

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001->	±150


Δ Order Code : 1000-XX-HB

Housing  
Number of contact : 2 to 15 pin

**TTAF  
APPROVAL**

Δ Material : Nylon 66 UL 94V-0

Voltage Rating : 100V AC,DC  
Current Rating : 1A AC,DC  
Withstanding Voltage : 500V/minute  
Insulation Resistance : 500M Ω Min  
Temperature Range : -25°C ~ + 85°C

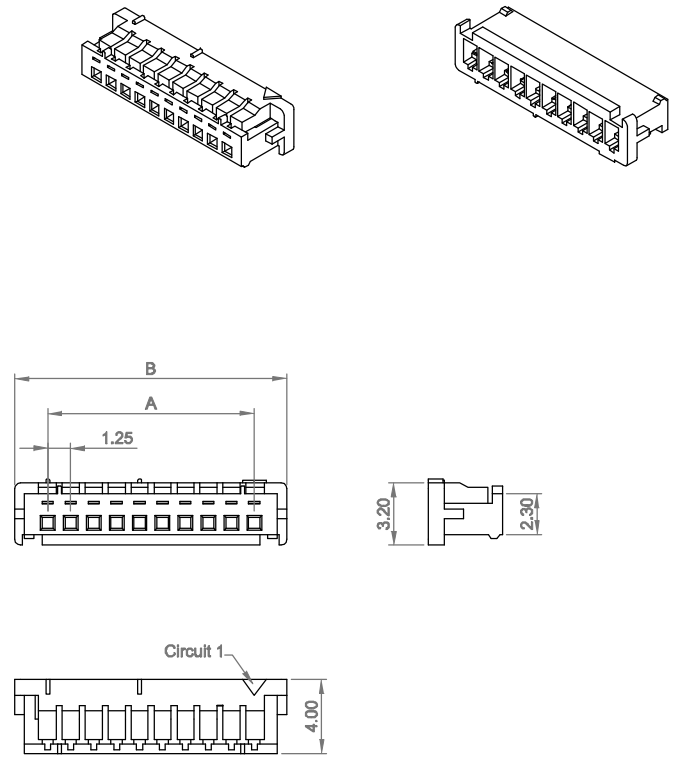

Contact No.	Dimensions(mm)	
	A	B
2	1.25	4.15
3	2.50	5.40
4	3.75	6.65
5	5.00	7.90
6	6.25	9.15
7	7.50	10.40
8	8.75	11.65
9	10.00	12.90
10	11.25	14.15
11	12.50	15.40
12	13.75	16.65
13	15.00	17.90
14	16.25	19.15
15	17.50	20.40

Date	07.03.2015	Rev.	-	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yegim AKSOY						<b>1000-XX-HB</b>		
Checked by	Fatih BOLACA								
							Drawing Nr.	Scale	Sheet No
								NONE	1/1