TTAF APPROVAL

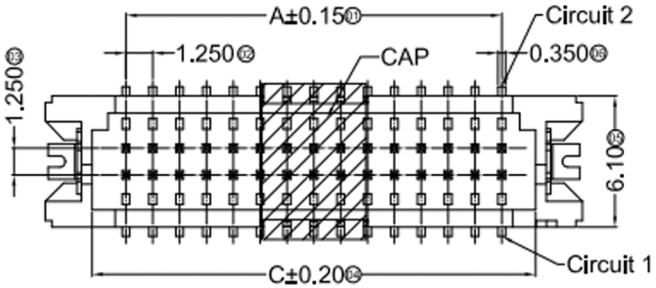

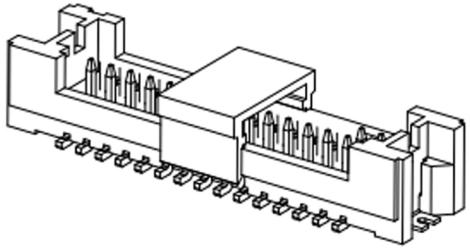

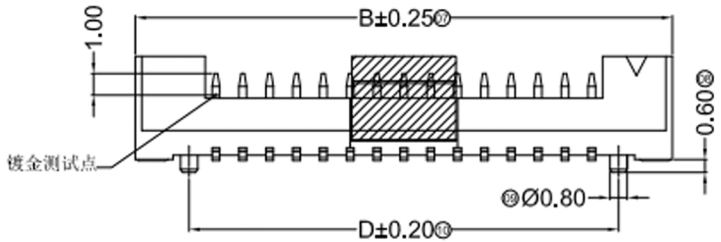



Specifications :

- Voltage rating: 150V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥500MΩ
- Contact resistance: ≤30mΩ
- After environmental testing：≤40mΩ

1000D-XXSPR-2*XX X-XX VXX XX
① ②③④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No.
② Category：W-wafer
③ Welding Board Angle: V- Straight 180°
④ Welding Way: S-SMT
⑤ Row No.-Pin No.: 2*XX-2*05P~2*25P
⑥ Plug the Pin & Special No.:
⑦ Material：6T-PA6T 94V-0 ; 9T-PA9T 94V-0
1T-PA10T 94V-0
⑧ Planting Category: V01-Gold Flash
V15- 15u" Au
⑨ Color：Blank-natural color

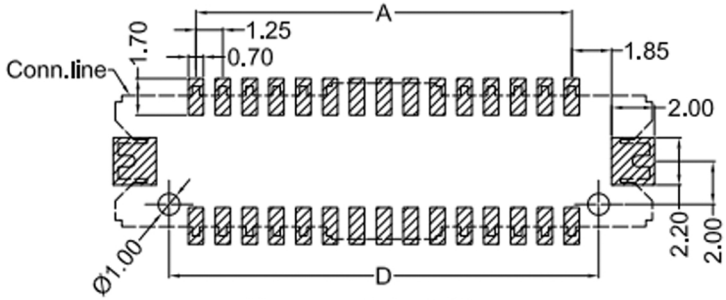

Recommended P.C.B Layout
General Tolerance±0.05

Dimensions(mm)				
Poles	A	B	C	D
2*05	5.00	12.50	8.15	7.50
2*06	6.25	13.75	9.40	8.75
2*07	7.50	15.00	10.65	10.00
2*10	11.25	18.75	14.40	13.75
2*12	13.75	21.25	16.90	16.25
2*15	17.50	25.00	20.65	20.00
2*20	23.75	31.25	26.90	26.25
2*25	30.00	37.50	33.15	32.50

		Brass	Gold-Flash	
	PA9T UL 94V-0			
PART NO	Material (Wafer And Cap)	Material (Pin And Solder Tabs)	Finish (Pin And Solder Tabs)	

			Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Date	30.11.2016						1000D-XXSPR		
Designed by	Yeşim AKSOY		-						
Checked by	Fatih BOLACA						Drawing Nr.	Scale	Sheet No
TTAF								NONE	1/1

A4