

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150

Δ Order Code : 1000D-XX-H


Housing

Number of contact : 10 to 40 pin A

**TTAF  
APPROVAL**

Δ Material : Nylon 66 UL 94V-0

Voltage Rating : 100V AC,DC  
 Current Rating : 1A AC,DC  
 Withstanding Voltage : 500V/minute  
 Insulation Resistance : 100M Ω Min  
 Temperature Range : -40°C ~ + 85°C

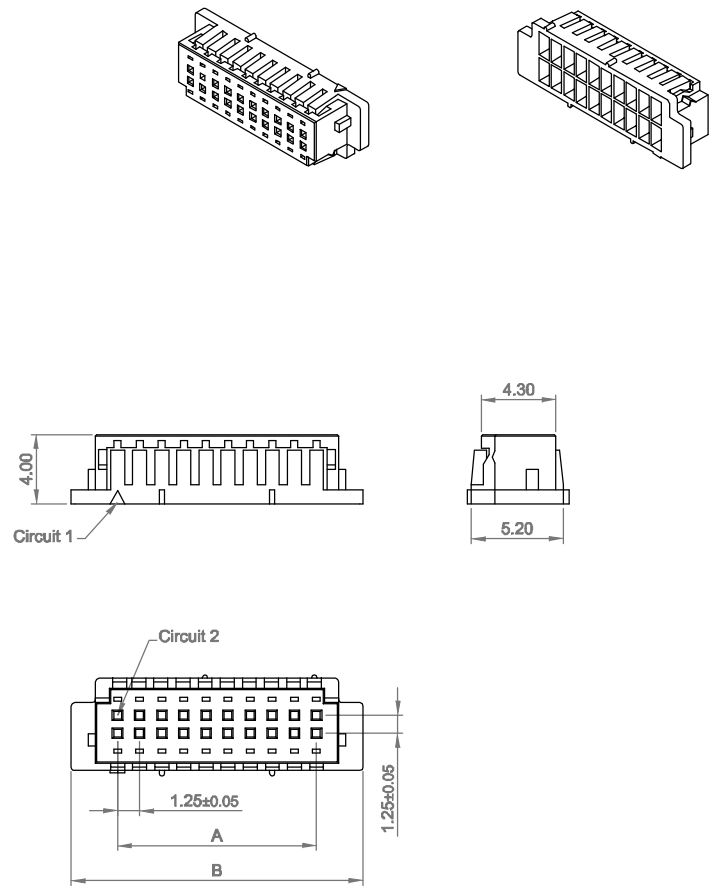

Contact No.	Dimensions(mm)	
	A	B
10	5.00	10.40
20	11.25	16.65
30	17.50	22.90
40	23.75	29.15

Date	15.04.2014	Rev.	-	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY						<b>1000D-XX-H</b>		
Checked by	Fatih BOLACA								
							Drawing Nr.	Scale	Sheet No
								NONE	1/1