

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
UNIT: mm	1001-3000	±50
	3001-5000	±100
	5001->	±150

△ Order Code : 1301-XX-R

Right Angle

Number of contact : 10 to 64 pin

**TTAF
APPROVAL**




Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1 AMP

Dielectric Withstanding

Voltage: AC 5 00V For 1 minute
 Operating Temperature: -55°C--+105°C
 Contact: Brass Gold Plated

Housing: PBT &30% Glass Fiber(UL 94V-0),Black

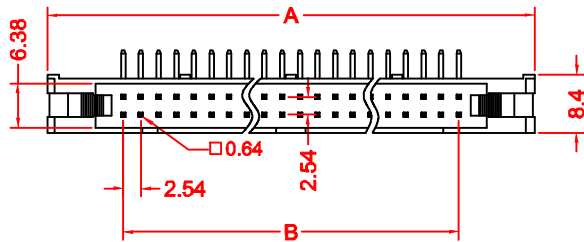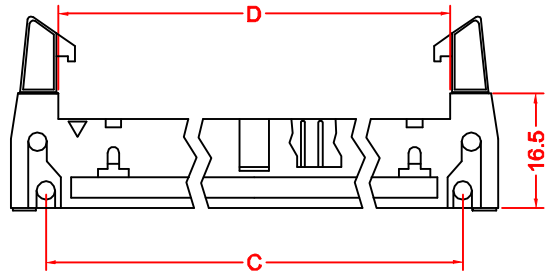

Position	A	B	C	D
10	32.00	10.16	21.84	17.96
12	34.54	12.70	24.38	20.50
14	37.08	15.24	26.92	23.04
16	39.62	17.78	29.46	25.58
20	44.70	22.86	34.54	30.66
26	52.32	30.48	42.16	38.28
30	57.40	35.56	47.24	43.36
34	62.48	40.64	52.32	48.44
40	70.10	48.26	59.94	56.60
50	82.80	60.96	72.64	68.76
60	95.50	73.66	85.34	81.46
64	100.58	78.74	90.42	86.54

Date	04.01.2016	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1301-XX-R
Designed by	Yeşim AKSOY										
Checked by	Fatih BOLACA										
										Drawing Nr.	-
										Scale	NONE
										Sheet No	1/1