

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150



△ Order Code : 1305-XX-P

Number of contact : 10 to 64 pin A

**TTAF  
APPROVAL**

△ Material : Housing - P.B.T & Glass Fiber 30% UL94V-0  
Pin - Phosphor Bronze

Voltage Rating : 500V AC,DC  
Current Rating : 1AMP  
Withstanding Voltage : 500V/minute  
Insulation Resistance : 1000M Ω Min  
Temperature Range : -55°C ~ + 105°C

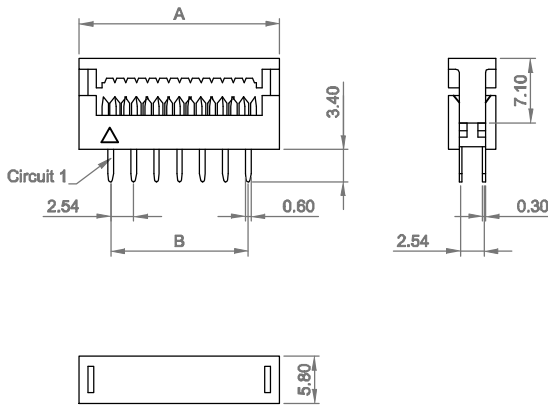

**P.C.B. LAYOUT**

Contact No.	Dimensions(mm)	
	A	B
10	17.80	10.16
14	22.82	15.24
16	25.40	17.78
20	30.52	22.86
26	38.12	30.48
30	43.32	35.56
34	48.40	40.64
40	55.92	48.26
50	68.72	60.96
60	81.42	73.66
64	86.38	78.74

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	<b>1305-XX-P</b>
Designed by	Yeşim AKSOY									Drawing Nr. Scale Sheet No	
Checked by	Fatih BOLACA										