

1

2

3

4

5



Δ Order Code : 1307-2*XX-RCA

Number of contact :
2x2 to 2x40 pin



**TTAF
APPROVAL**

Δ Material : P.B.T UL94V-0
Pin.:Brass/Gold plated

Voltage Rating : 250V AC,DC
Current Rating : 3A.
Withstanding Voltage : 1.000V AC/minute
Insulation Resistance : 1.000M Ω Min.
Temperature Range : -25 °C ~ + 85 °C
Contact Resistance : 20M ohm max

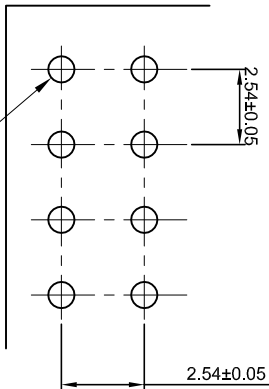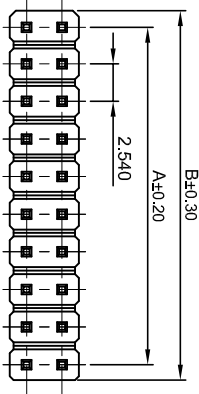


P.C.B. thickness 0.8 ~ 1.6 mm
P.C.B. Hole dia. Ø 1.20 mm±0.05

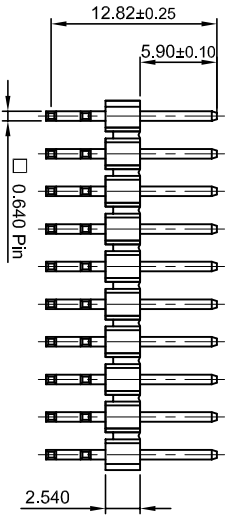

Contact No.	Dimensions(mm)	
	A	B
2x2	2.54	5.08
A:2.54x(PART NO. OF PIN/2-1) B:2.54x(PART NO. OF PIN/2)	2x40	99.06
		101.60

Date	12.07.2007	Rev.	Rev. No	Revision Detail	Rev.Dt.	Rev.by	Drawing Nr.	Model
Designed by	HELEN		-					
Checked by	N.ERGILER		-					



Project Name **1307-2*XX-RCA**
File Name
Scale Sheet No
NONE 1/1

VIEW:	TOLERANCE
	.0 ±0.25
	.00 ±0.10
UNIT: mm	.000 ±0.05

E

D

C

B

A

E

D

C

B

A

1

2

3

4

5