

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
UNIT: mm	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001- >	±150



Δ Order Code : 1307-2\*XX-SCB

Number of contact :  
2x2 to 2x40 pin



**TTAF  
APPROVAL**

Δ Material : P.B.T+15%GF UL94V-0  
Nylon 6T UL94V-0  
Pin.:Brass/Tin & Gold-Plated

Voltage Rating : 250V AC,DC  
Current Rating : 2A.  
Withstanding Voltage : 800V AC/minute  
Insulation Resistance : 1.000M Ω Min.  
Temperature Range : -25 °C ~ + 85 °C  
Contact Resistance : 20M ohm max

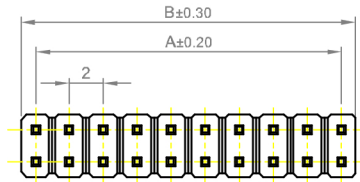

P.C.B. thickness 0.8 ~ 1.6 mm  
P.C.B. Hole dia. Ø 0.85 mm±0.05

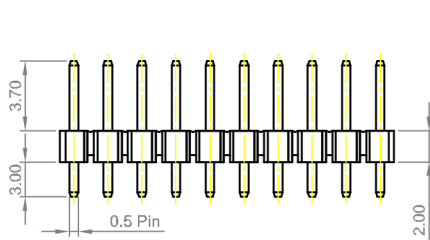

Contact No.	Dimensions(mm)	
	A	B
2x2	2	5.08
A:2x(PART NO. OF PIN/2-1) B:2x(PART NO. OF PIN/2)		
2x40	99.06	101.60

Date	03.11.2014	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY	-				<b>1307-2*XX-SCB</b>		
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
						-	NONE	1/1