

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
UNIT: mm	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150





Δ Order Code : 1307-XX-RTA

Number of contact : 2 to 40 pin

**TTAF  
APPROVAL**

Δ Material : P.B.T %30 UL94V-0  
Pin.:Brass/Gold plated

Voltage Rating : 250V AC,DC  
Current Rating : 3A.  
Withstanding Voltage : 1.000V AC/minute  
Insulation Resistance : 1.000M Ω Min.  
Temperature Range : -25 °C ~ + 85 °C  
Contact Resistance : 20M ohm max

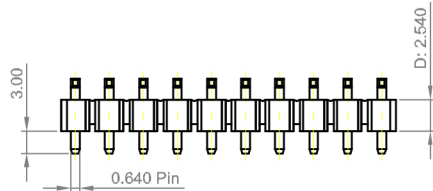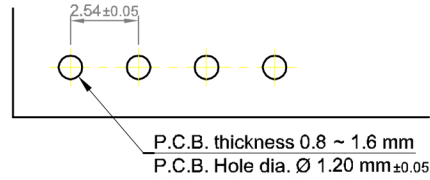

Contact No.	Dimensions(mm)	
	A	B
2	2.54	5.08
A:2.54x(PART NO. OF PIN-1) B:2.54x(PART NO. OF PIN)		
40	99.06	101.60

Date	03.11.2014	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY	-				<b>1307-XX-RTA</b>		
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
						-	NONE	1/1