

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
UNIT: mm	1001-3000	±50
	3001-5000	±100
	5001->	±150





Δ Order Code : 1307-2\*XX-SCA

Number of contact :  
2x2 to 2x40 pin

**TTAF  
APPROVAL**

Δ Material : Nylon 6T, UL94V-0  
Pin.:Brass/Gold plated

Voltage Rating : 130V AC,DC  
Current Rating : 1A.  
Withstanding Voltage : 800V AC/minute  
Insulation Resistance : 1.000M Ω Min.  
Temperature Range : -25 °C ~ + 85 °C  
Contact Resistance : 20M ohm max

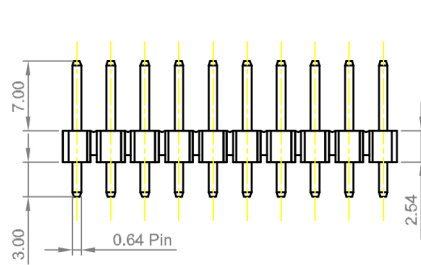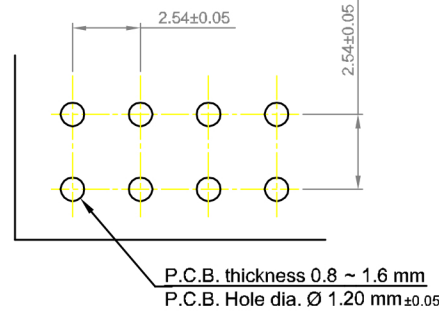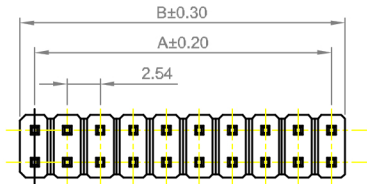

Contact No.	Dimensions(mm)	
	A	B
2x2	2.00	4.00
A:2.54x(PART NO. OF PIN/2-1) B:2.54x(PART NO. OF PIN/2)		
2x40	78.00	80.00

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	<b>1307-2*XX-SCA</b>		
Designed by	Yeşim AKSOY	Checked by	Fatih BOLACA							Drawing Nr.		Scale	Sheet No
										-		NONE	1/1

