


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
UNIT: mm	1001-3000	±50
	3001-5000	±100
	5001->	±150

Δ Order Code : 1307-XX-STA



Number of contact : 2 to 40 pin

**TTAF
APPROVAL**



Δ Material : Nylon 6T, UL94V-0
Pin.:Brass/Gold plated

Voltage Rating : 130V AC,DC
Current Rating : 1A.
Withstanding Voltage : 800V AC/minute
Insulation Resistance : 1.000M Ω Min.
Temperature Range : -25 °C ~ + 85 °C
Contact Resistance : 20M ohm max

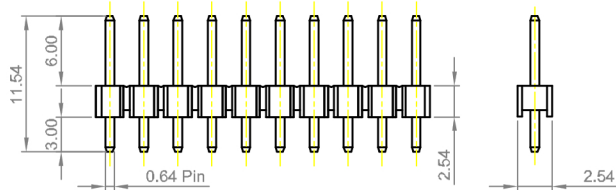

Contact No.	Dimensions(mm)	
	A	B
2	2.00	4.00
A:2.54x(PART NO. OF PIN-1) B:2.54x(PART NO. OF PIN)		
40	78.00	80.00

Date	03.11.2014	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY	-				1307-XX-STA		
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
						-	NONE	1/1