


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150

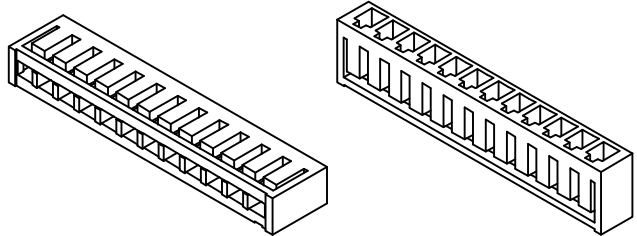


Δ Order Code : 1311-XX-P

Housing
Number of contact : 2 to 16 pin



**TTAF
APPROVAL**

Δ Material : Nylon 66 UL94V-0

Voltage Rating : 250V AC,DC
 Current Rating : 3A AC / DC
 Withstanding Voltage : 800V AC/minute
 Insulation Resistance : ≥1000M Ω Min
 Temperature Range : -25 °C ~ + 85 °C
 Contact resistance : ≤10m Ω
 After environmental testing: ≤20m Ω



P.C.B. LAYOUT

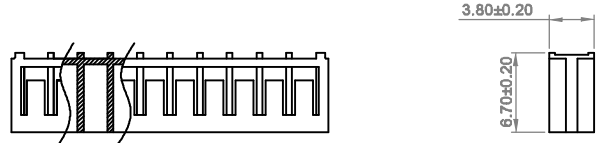

Contact No.	Dimensions(mm)	
	A	B
2	2.50	6.60
3	5.00	9.10
4	7.50	11.60
5	10.00	14.10
6	12.50	16.60
7	15.00	19.10
8	17.50	21.60
9	20.00	24.10
10	22.50	26.60
11	25.00	29.10
12	27.50	31.60
13	30.00	34.10
14	32.50	36.60
15	35.00	39.10
16	37.50	41.60

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1311-XX-P
Designed by	Yeşim AKSOY	Checked by	Fatih BOLACA							Drawing Nr.	
										Scale	NONE
										Sheet No	1/1

