



VIEW	1	
TOLERANCE	0.10	±1
	11-280	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001- >	±150

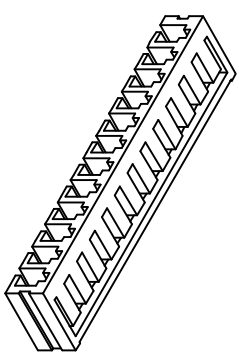



Δ Order Code : 1313-XX-P





Housing
Number of contact : 2 to 16 pin

Δ Material : Nylon 66 UL94V-0

Voltage Rating : 250V AC,DC
 Current Rating : 3A
 Withstanding Voltage : 800V AC/minute
 Insulation Resistance : 1000M Ω Min.
 Temperature Range : -25 °C - + 85 °C

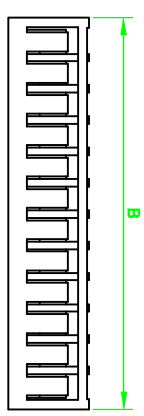

P.C.B.LAYOUT

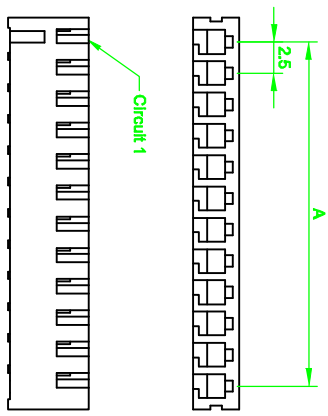

Contact No.	Dimensions(mm)	
	A	B
2	2.50	6.50
3	5.00	9.00
4	7.50	11.15
5	10.00	14.00
6	12.50	16.50
7	15.00	19.00
8	17.50	21.50
9	20.00	24.00
10	22.50	26.50
11	25.00	29.00
12	27.50	31.50
13	30.00	34.00
14	32.50	36.50
15	35.00	39.00
16	37.50	41.50

Circuit 1

Date	03.11.2014	Rev.	-	Revision Detail	Rev.Dt.	Rev.by	Part No
Designed by	Yesim AKSOY						1313-XX-P
Checked by	Fatih BOLACA						
Drawing Nr.		Scale	NONE	Sheet No	1/1		



1 2 3 4 5 6 A4