

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
UNIT: mm	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150


Δ Order Code : 1314-XX-H

Housing
Number of contact : 2 to 40 pin

**TTAF
APPROVAL**

Δ Material : Nylon 66+15% GF UL 94V-0

Voltage Rating : 50V AC,DC
Current Rating : 1A AC,DC
Withstanding Voltage : 500V/minute
Insulation Resistance : 100M Ω Min
Temperature Range : -25°C ~ + 85°C

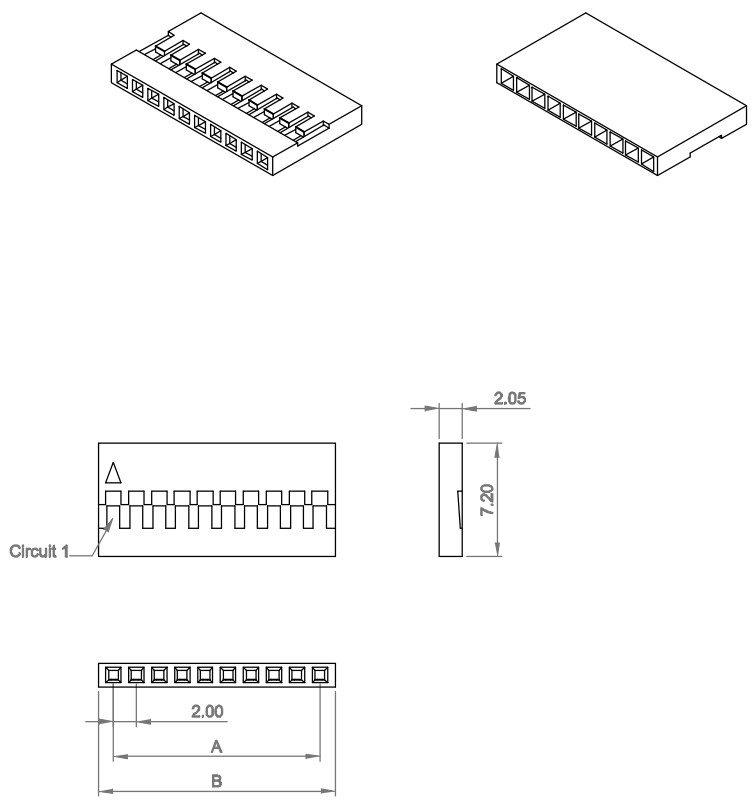

Contact No.	Dimensions(mm)	
	A	B
2	2.00	4.30
3	4.00	6.30
A: 2.00 x (PART NO. OF PIN-1) B: 2.30 + A		
40	78.00	80.30

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1314-XX-H		
Designed by	Yeşim AKSOY												
Checked by	Fatih BOLACA												
											Drawing Nr.	Scale	Sheet No
											-	NONE	1/1