
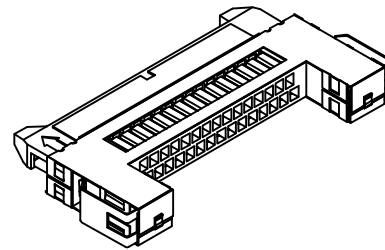


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150

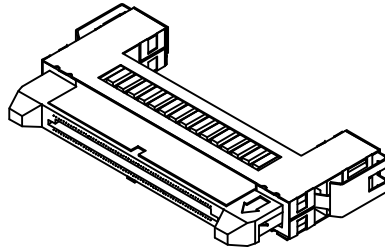





Δ Order Code : 1620-XX-H

Housing  
Number of contact : 31,41 end  
51 pin

**TTAF  
APPROVAL**

Δ Material : UL94V-0

Voltage Rating : 100V AC,DC  
Current Rating : 0.5 A.  
Withstanding Voltage : 300V AC/minute  
Insulation Resistance : 500M Ω Min  
Temperature Range : -25 °C ~ + 85 °C  
Contact Resistance : 60m Ω Max.

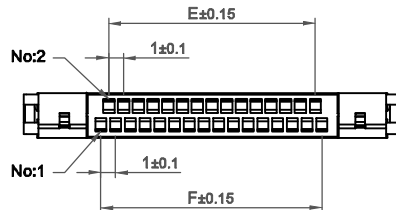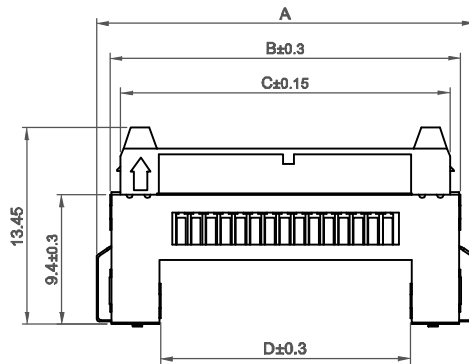

Contact No.	Dimensions(mm)					
	A	B	C	D	E	F
31	27	24.6	22.6	18.3	14	15
41	32	29.6	27.6	23.3	19	20
51	37	34.6	32.6	28.3	24	25

Date	03.11.2014	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY	-				<b>1620-XX-H</b>		
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
						-	NONE	1/1