

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001- >	±150

△ Order Code : 1630-XX-XH




Housing
Number of contact : 30 pin

**TTAF
APPROVAL**

△ Material : Nylon 46 UL94V-0

△ Material : Nylon 66 UL94V-0

Voltage Rating : 200V AC,DC
Current Rating : 0.8A.
Withstanding Voltage : 500V AC/minute
Insulation Resistance : 100M Ω Min
Temperature Range : -40 °C ~ + 80 °C

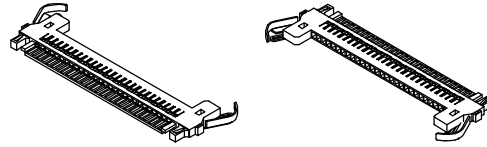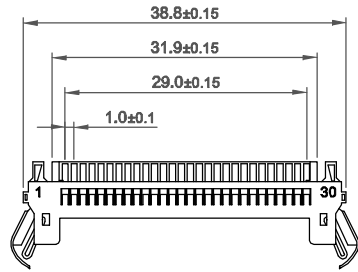

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1630-XX-XH	
Designed by	Yeşim AKSOY									Drawing Nr.		-
Checked by	Fatih BOLACA									Scale		NONE
										Sheet No	1/1	



1

2

3

4

5

6

A4