


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
UNIT: mm	1001-3000	±50
	3001-5000	±100
	5001->	±150

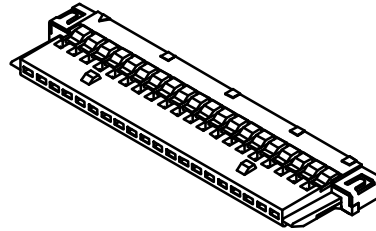




△ Order Code : 1750-XX-H

Housing
Number of contact : 08, 14, 20
and 30 pin

**TTAF
APPROVAL**

△ Material : Nylon 66, UL94V-0
Shell: Phosphor Bronze/Tin-plated

Voltage Rating : 50V AC,DC
Current Rating : 1A.
Withstand Voltage : 500V AC/minute
Insulation Resistance : 100M Ω Min.
Temperature Range : -25 °C ~ + 85 °C

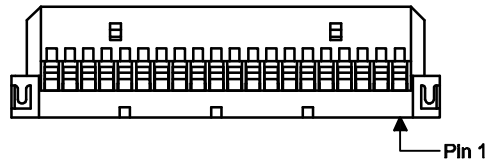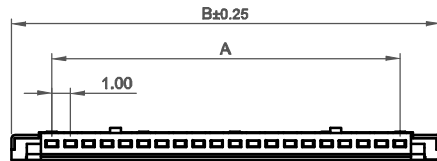

Contact No.	Dimensions (mm)	
	A	B
08	7.00	11.50
14	13.00	17.50
20	19.00	23.50
30	29.00	33.50

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1750-XX-H	
Designed by	Yeşim AKSOY									Drawing Nr.		-
Checked by	Fatih BOLACA									Scale		NONE
										Sheet No	1/1	