


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001- >	±150

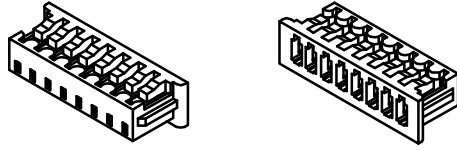

△ Order Code : 1800-XX-H




Housing

Number of contact : 2 to 15 pin

**TTAF  
APPROVAL**

△ Material : Nylon 66 UL94V-0

Voltage Rating : 125V AC,DC  
 Current Rating : 1A  
 Withstanding Voltage : 500V AC/minute  
 Insulation Resistance : 100M ohm/minute  
 Temperature Range : -25 °C ~ + 85 °C



Contact No.	Dimensions (mm)			
	A	B	C	D
2	1.25	2.95	3.55	4.25
3	2.50	4.20	4.80	5.50
4	3.75	5.45	6.05	6.75
5	5.00	6.70	7.30	8.00
6	6.25	7.95	8.55	9.25
7	7.50	9.20	9.80	10.50
8	8.75	10.45	11.05	11.75
9	10.00	11.70	12.50	13.00
10	11.25	12.95	13.30	14.25
11	12.50	14.20	14.80	15.50
12	13.75	15.45	16.05	16.75
13	15.50	16.70	17.30	18.00
14	16.25	17.95	18.55	19.25
15	17.50	19.20	19.80	20.50

Date	03.11.2014	Rev.		Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY	-					<b>1800-XX-H</b>		
Checked by	Fatih BOLACA								
							Drawing Nr.	Scale	Sheet No
							-	NONE	1/1