



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001->	±150



Δ Order Code : 1800-XX-S



Straight Angle

Number of contact : 2 to 15 pin

**TTAF
APPROVAL**



Δ Material : Nylon 9T UL94V-0
Pin Material : Brass/Tin-Plated

Voltage Rating : 125V AC,DC
Current Rating : 1A
Withstanding Voltage : 500V AC/minute
Insulation Resistance : 100M ohm/minute
Temperature Range : -25 °C ~ + 85 °C
Contact Resistance : 20m Ω Max.

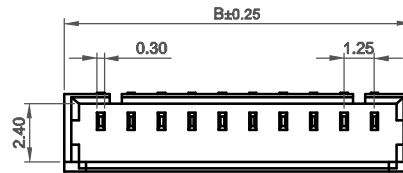

P.C.B Hole dia. 0.5mm±0.05
P.C.B Thickness 0.8mm±0.05

P.C.B. LAYOUT

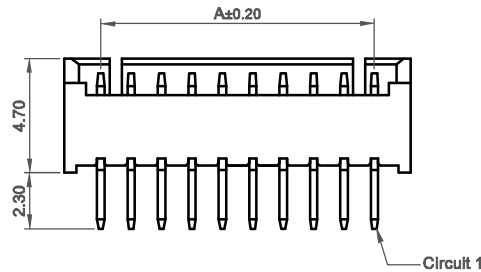

Contact No.	Dimensions (mm)	
	A	B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1800-XX-S	
Designed by	Yeşim AKSOY	Checked by	Fatih BOLACA							Drawing Nr.		-
										Scale		NONE
										Sheet No	1/1	

1

2

3

4

5

6

A4