



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150





Δ Order Code : 1900-XX-H

Housing
Number of contact : 2 to 30 pin

**TTAF
APPROVAL**

Δ Material : Nylon 66 UL 94V-0

Voltage Rating : 50V AC,DC
Current Rating : 1A
Withstanding Voltage : 500V AC/minute
Insulation Resistance : 100M Ω Min
Temperature Range : -25 °C ~ +85 °C

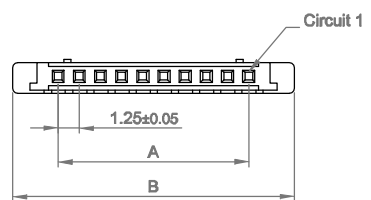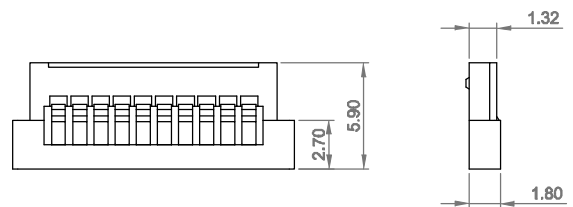

Contact No.	Dimensions(mm)	
	A	B
2	1.25	6.10
3	2.50	7.35
4	3.75	8.60
5	5.00	9.85
6	6.25	11.10
7	7.50	12.35
8	8.75	13.60
9	10.00	14.85
10	11.25	16.10
15	17.50	22.35
20	23.75	28.60
25	30.00	34.85
30	36.25	41.10

Date	03.11.2014	Rev.		Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY		-				1900-XX-H		
Checked by	Fatih BOLACA								
							Drawing Nr.	Scale	Sheet No
							-	NONE	1/1