



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001- >	±150






▲ Order Code : 2316-XX-S

→ Straight wafer  
→ Number of contact : 2 to 15 pin


**TTAF  
APPROVAL**

▲ Material : Nylon 66 UL 94V-0

Voltage Rating : 250V AC,DC  
Current Rating : 3A  
Withstanding Voltage : 1000V AC/minute  
Insulation Resistance : 1.000M Ω Min  
Temperature Range : -25 °C ~ +85 °C

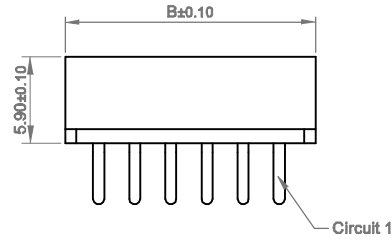

**P.C.B. LAYOUT**



Contact No.	Dimensions(mm)	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

Date	03.11.2014	Rev.	-	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY						<b>2316-XX-S</b>		
Checked by	Fatih BOLACA								
							Drawing Nr.	Scale	Sheet No
							-	NONE	1/1