



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001->	±150



Δ Order Code : 200G1-XX-R



Straight Angle 90°

Number of contact : 2 to 15 pin

**TTAF
APPROVAL**



Δ Material : Nylon 66, UL94V-0
Pin: Brass/Tin-plated

Voltage Rating : 250V AC,DC
Current Rating : 2.5A
Withstanding Voltage : 800V AC/minute
Insulation Resistance : 1.000M Ω Min.
Temperature Range : -25 °C ~ + 85 °C
Contact Resistance : 20m Ω Max.

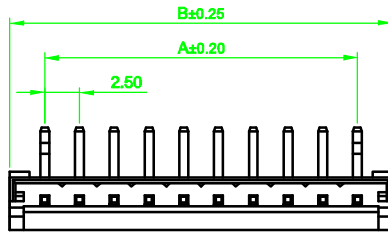

P.C.B Thickness 0.80~1.60mm
P.C.B Hole dia Ø1.00mm±0.05

P.C.B. LAYOUT

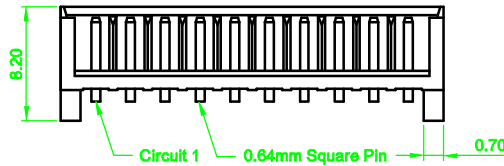

Contact No.	Dimensions (mm)	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

Date	05.03.2014	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY	-				200G1-XX-R		
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
							NONE	1/1