

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001->	±150

Δ Order Code : 3920-XX-M



Male

Number of contact : 2 to 15 pin

**TTAF  
APPROVAL**

Δ Material : Nylon 66 UL 94V-0

Voltage Rating : 300V AC,DC  
 Current Rating : 10A AC,DC  
 Withstanding Voltage : 1500V AC/minute  
 Insulation Resistance : 1000M Ω Min  
 Temperature Range : -25 °C ~ + 85 °C

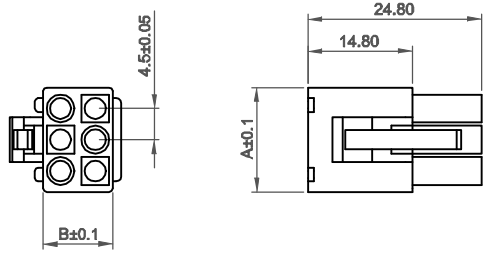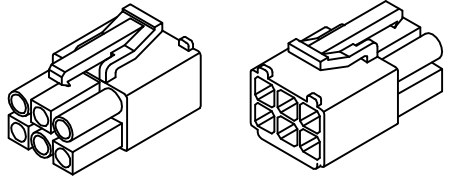

Contact No.	Dimensions(mm)	
	A	B
1x2	10.30	5.80
1x3	14.80	5.80
1x4	19.30	5.80
2x2	10.30	10.30
3x2	14.80	10.30
3x3	14.80	14.80
4x3	14.80	14.80
5x3	23.80	14.80

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	<b>3920-XX-M</b>	
Designed by	Yeşim AKSOY	Checked by	Fatih BOLACA							Drawing Nr.		-
										Scale		NONE
										Sheet No	1/1	