


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150




Δ Order Code : 5558-XX-H

Housing
Number of contact : 2 to 24 pin


**TTAF
APPROVAL**

Δ Material : UL94V-0

Voltage Rating : 600V AC
Current Rating : 9A
Withstanding Voltage : 1500V AC/minute
Insulation Resistance : 1000M Ω Min
Temperature Range : -25 °C ~ + 105 °C
Contact Resistance : <10m Ω

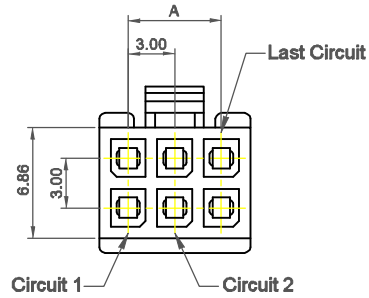

Contact No.	Dimensions(mm)	
	A	B
2	-	3.90
4	3.00	6.90
6	6.00	9.90
8	9.00	12.90
10	12.00	15.90
12	15.00	18.90
14	18.00	21.90
16	21.00	24.90
18	24.00	27.90
20	27.00	30.90
22	30.00	33.90
24	33.00	36.90

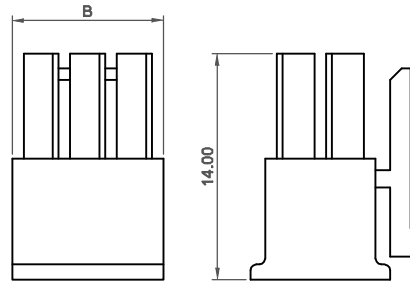

Date	03.11.2014	Rev.		Revision Detail		Rev.Dt.		Rev.by		Part No		
Designed by	Yeşim AKSOY		-							5558-XX-H		
Checked by	Fatih BOLACA											
										Drawing Nr.	Scale	Sheet No
										-	NONE	1/1