

1

2

3

4

5

6

Model Number: KLM-62**Product Appearance: 2 PIN DIŞI+ERKEK KLEMENS (0.20-2.5MM²)****Outline Dimension: 47.6×15.7×11.2mm (As the right)****Technical Data****1.Material:**

(1) Plastic shell of Interfacing part: PA

Other Plastic Shell: PC

(2) Handle:POM (Non-flame retardant)

(3) Conduction Part: T3 Copper (tinplating)

(4)Metal Parts: Stainless steel 301

2.Voltage/Current: 450V/24A**3.Withstand Voltage: AC 1minute 2000V****4.Flame Retardation: (plastic shell of Interfacing par):
Glow Wire 650°C,Fire retardant**

(other plastic shell): Glow Wire850°C,Fire retardant




5.Tensile Force(N):0.2≥10,0.34≥15,0.5≥20


0.75≥25,1.0≥30,1.5≥40,2.5≥50

6.Working temperature(°C): -40 ~ 80°C**7.Cross section (mm2):BVR: 0.2-1.5 BV: 0.2-2.5****8.Multisplíce****Package**

pcs/paper box, pcs/CTN,

Measurement: CM, G.W: KG

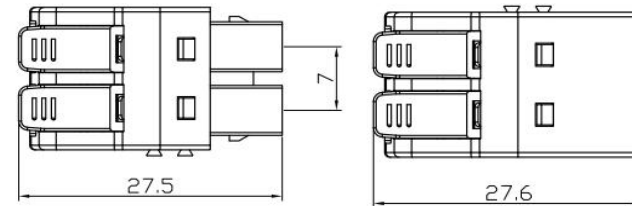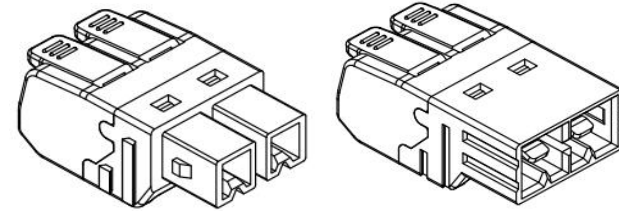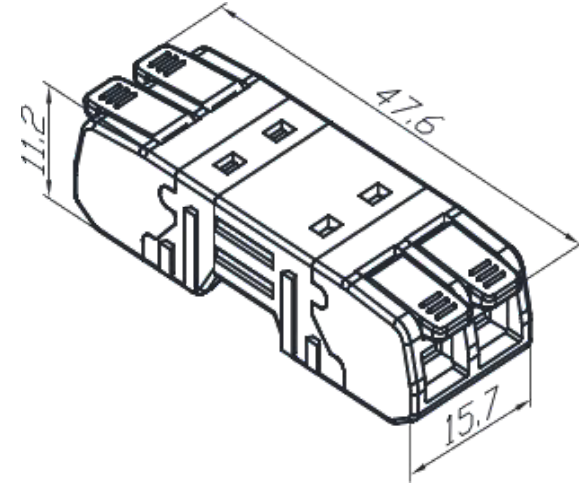

Date	-	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Rabia MUZAÇ	-				2 PIN DIŞI+ERKEK KLEMENS (0.20-2.5MM ²)		
Checked by	Ersin YÜKSEL							
						Drawing Nr.	Scale	Sheet No
						KLM-62	NONE	1/1

1

2

3

4

5

6