
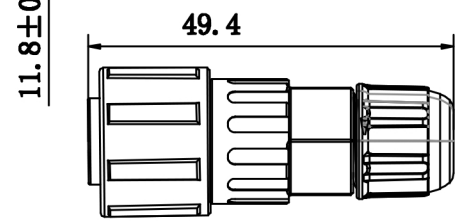
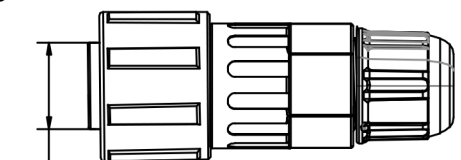
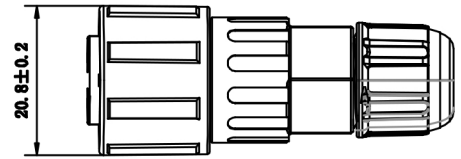
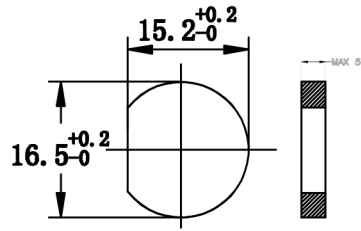



**TTAF  
APPROVAL**

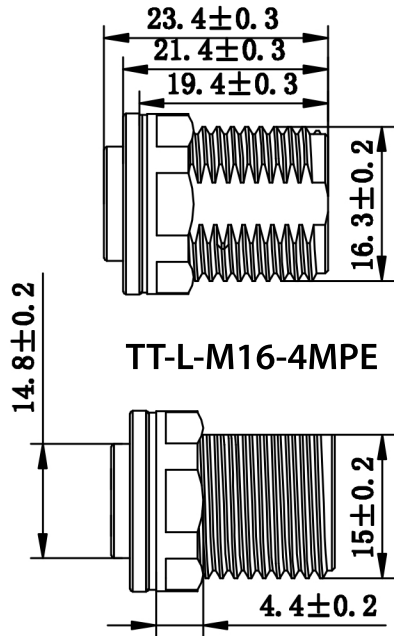

**TT-L-M16 4FSX**

**Material:**  
 Connector: Nylon+GF  
 Contact: Brass with Gold plated  
**Specification:**  
 Current Rating: 10A (Ø1.5mm)  
 Voltage Rating: 300V/AC  
 Contact Resistance: <10mohm  
 Insulation Resistance: 100Mohm at 500V/DC  
 Breakdown Voltage: 300V AC/1Minute 2mA  
 Temperature Rating: -40°C +105°C  
 Waterproof rating: IP68  
 Durability (Plug/Unplug): 2000times

Date	30.11.2016	Rev	Revision Detail	Rev.Dt	Rev.by	Part No
Designed by	Yeşim AKSOY	-				<b>TT-L-M16-4</b>
Checked by	Fatih BOLACA					
						Drawing Nr. Scale Sheet No
						NONE 1/1