

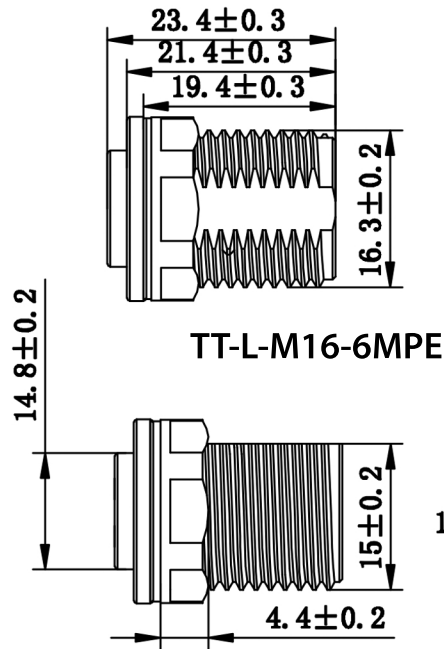


**TTAF
APPROVAL**




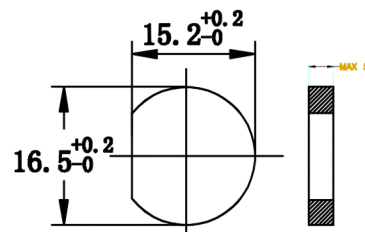


TT-L-M16-6MPE

M16-Male



M16-Female

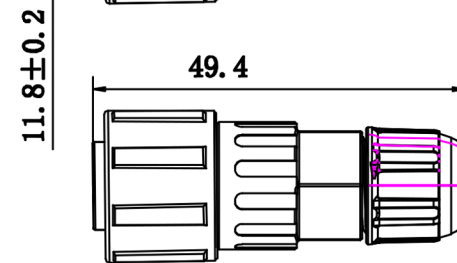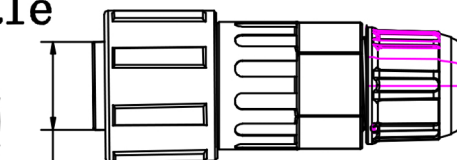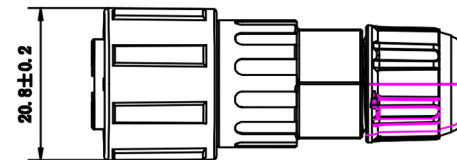

TT-L-M16-6FSX

Material:
 Connector: Nylon+GF
 Contact: Brass with Gold plated
Specification:
 Current Rating: 5A(φ0.8mm)
 Voltage Rating: 110V/AC
 Contact Resistance: <10mohm
 Insulation Resistance: 100Mohm at 300V/DC
 Breakdown Voltage: 300V AC/1Minute 2mA
 Temperature Rating: -40°C +105°C
 Waterproof rating: IP68
 Durability (Plug/Unplug): 2000times

Date	30.11.2016	Rev		Revision Detail	Rev.Dt.	Rev.by	Part No	
Designed by	Yeşim AKSOY		-				TT-L-M16-6	
Checked by	Fatih BOLACA							
							Drawing Nr.	
							Scale	Sheet No
							NONE	1/1