
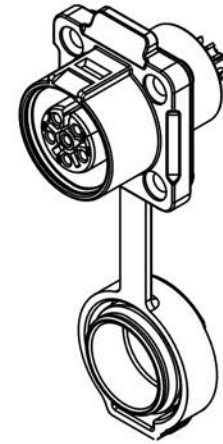
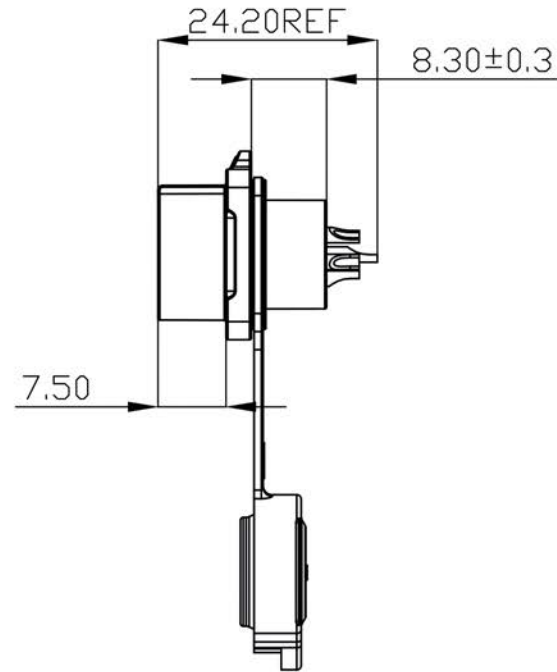



Unspecified tolerance

X. ± 0.50 X.° $\pm 3^\circ$
X.X ± 0.3 X.X° $\pm 2^\circ$

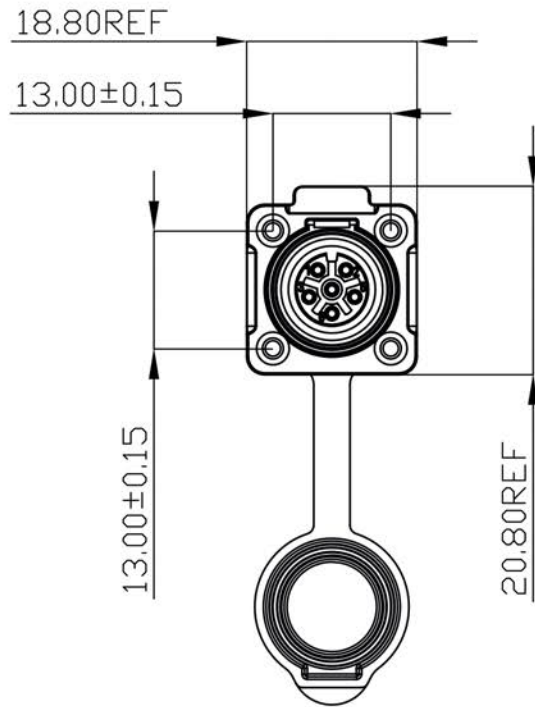

Technical parameters:

- 1, Housing material:PBT high performance engineering plastic
- 2, IP rating: IP67 (Selectable IP68 1m/2h)
- 3, Rated current: 5A
- 4, Rated voltage: AC 125V
- 5, Withstand voltage:AC 1500V
- 6, Fire rating:UL94 V-0
- 7, Wire section: 0.5mm²/20AWG
- 8, Operating temperature: -40~+85°C
- 9, Certifications: UL/TUV/RoHS/CE
- 10, Pluggable life: ≥ 1900 times
- 11, Number of poles:6P

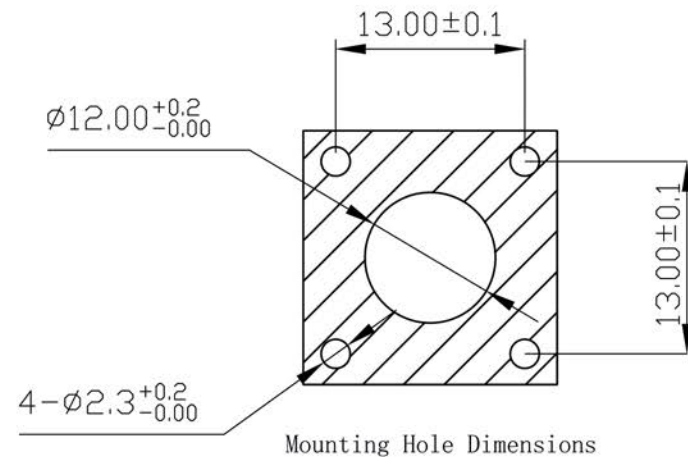

Date	16.04.2024	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	M12 6PİN PANEL TİPİ DİŞİ PLUG
Designed by	Rabia MUZAÇ									Drawing Nr.	TT12-06F-PE
Checked by	Ersin YÜKSEL									Scale	NONE
										Sheet No	1/1

