
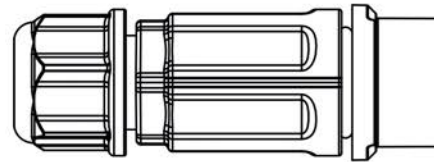
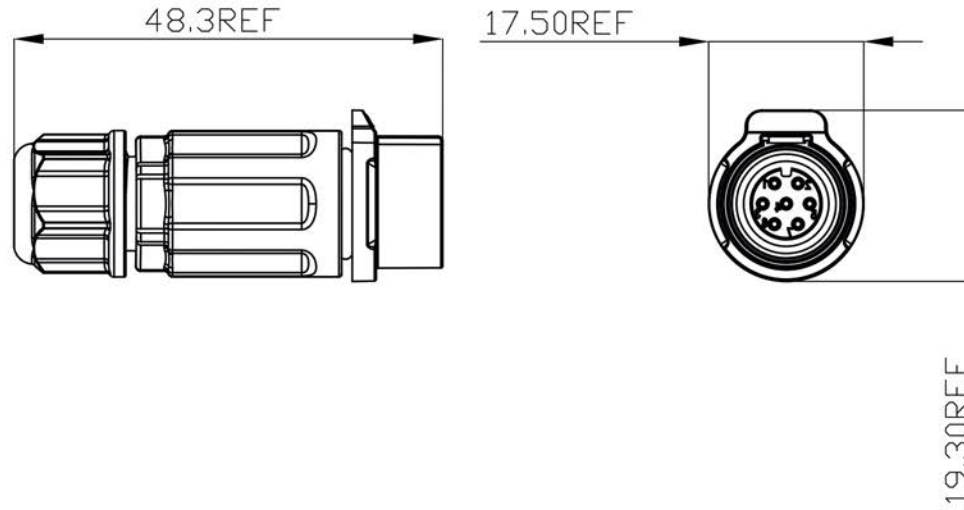


Unspecified tolerance

X.  $\pm 0.50$  X.°  $\pm 3^\circ$   
X.X  $\pm 0.3$  X.X°  $\pm 2^\circ$

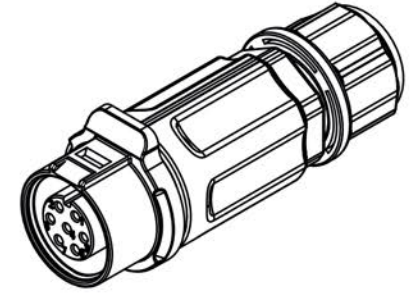

### Technical parameters:

1. Housing material: PBT high performance engineering plastic
2. IP rating: IP67 (Selectable IP68 1m/2h)
3. Rated current: 3A
4. Rated voltage: AC 100V
5. Withstand voltage: AC 1000V
6. Fire rating: UL94 V-0
7. Wire section:  $0.34\text{mm}^2/22\text{AWG}$
8. Operating temperature:  $-40\sim+85^\circ\text{C}$
9. Certifications: UL/TUV/RoHS/CE
10. Pluggable life:  $\geq 1900$  times
11. Number of poles: 7P

Date	16.04.2024	Rev.		Revision Detail		Rev.Dt.		Rev.by		Part No		
Designed by	Rabia MUZAÇ		-							M12 7PİN KABLO TİPİ DİŞİ SOKET		
Checked by	Ersin YÜKSEL										Drawing Nr.	Scale
										TT12-07F-SX	NONE	1/1