


VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
UNIT: mm	11-50	±0.5
	51-100	±1
	101-250	±2
	251-500	±5
	501->	±10

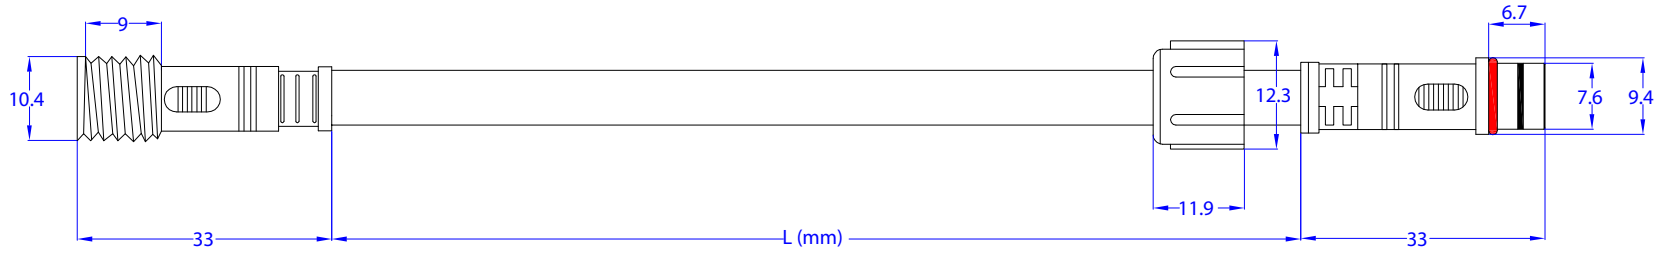

Technical Datas	
Pins	4
U (max)	300 V
I (max)	1.5 A
Cable Material	UL-PVC
Cable Color	Black
Insulation resistance	$\geq 10 \Omega$
Resistance	$\leq 5m \Omega$
Ambient temperature product	-35°C...+80°C
Contact material	Metal, Nickel-plated
Contact-carrier material	Plastic
Grip body material	Plastic
Coupling nut material	Plastic
Sealing (female) material	FPM/FKM
Standard	AWM 2464
Degree of protection (mounted)	IP67
Mechanical life-cycle	>100 mating cycles
Overvoltage category / Pollution	CATIII / 2
Flame Test (Cable)	VW-1 & FT1
Flame Test (Connector)	EN 60335-1 Glow wire
Cable manufacturer	E318347

ORDER CODE:

WP-27FM XXXX XX X

Color : B: Black W: White

Cable : 4x0,22 LIYY KABLO SİYAH DIŞ KILIF 90C

Lenght : L (mm)

6	-	PVC MOLDING (black or white)	-	-	-
5	-	PVC NUT (black or white)	-	1	pc.
4	-	GASKET (red)	-	1	pc.
3	-	TERMINAL - FEMALE	-	4	pcs.
2	-	TERMINAL - MALE	-	4	pcs.
1	-	4x0,22 LIYY KABLO SİYAH DIŞ KILIF 90C	-	2	pcs.

No	Material Code	Description	Size (mm)	Q'ty	Unit
----	---------------	-------------	-----------	------	------

Date	25.11.2022	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	
Designed by	Zeynep ŞAHİN									WP-27FM 4 Pin Seal Harness	
Checked by	Fatih BOLACA										



Drawing Nr.	Scale	Sheet No
-	NONE	3/3