



1	Raw Material	PA66, SILICONE, COPPER ALLOY
	Certification	CQC/Rohs/CE
	Flame-resistant rating	UL94 V-0
	Level of protection	IP68
	Voltage rating/Current rating	450 V / 10 A
	Withstanding voltage	2500 V
	Cable gague	0.5~1.5mm ²
	Operating temperature	-40~105 °C




Female connector



Male connector

3 PIN

TOLERANCE UNSPECIFIED			
X. ±0.35	X.XX	±0.10	X.° ±3°
X.X ±0.20	X.XXX	±0.05	X.X° ±2°
			XXX° ±1°

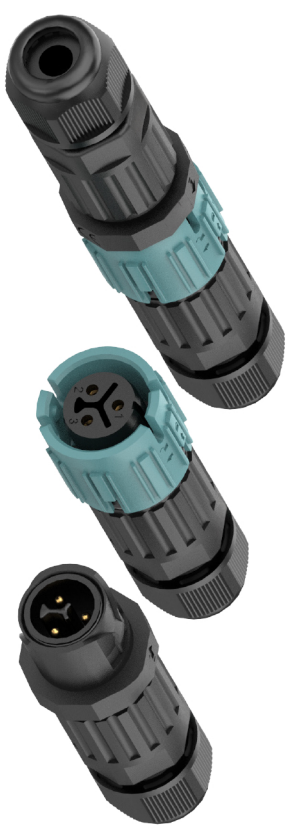

Rubbers Diameter

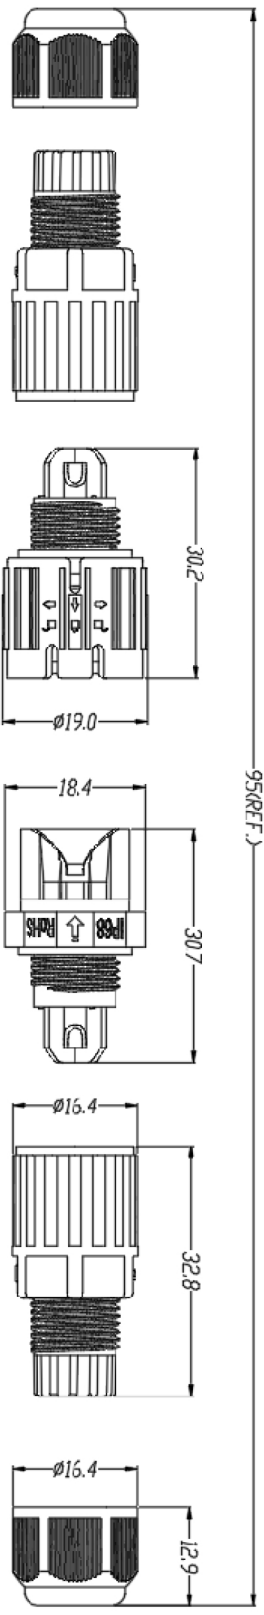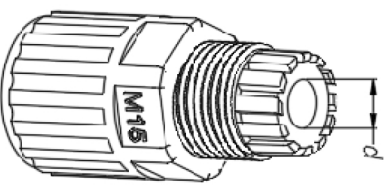

Part Number	Rubbers Diameter (d)	Outer Cable Diameter
WP1-M15-MF-03M10	φ 6.5 mm	φ 3.5~7 mm

Date	Rev.	Revision Detail	Rev./Dt.	Rev/by	Part No
Designed by					3 Pin Lehim Tipi Dış-Erkek Su Geçirmezli Konnektör IP68
Checked by					
					Drawing Nr.
					Scale
					Sheet No
					1/1