




1	2
Raw Material	PA66, SILICONE, COPPER ALLOY
Certification	UL/CQC/ROHS/CE
Flame-resistant rating	UL94 V-0
Level of protection	IP68
Voltage rating/Current rating	450 V / 16 A
Withstanding voltage	2500 V
Cable gauge	0.5~1.5mm ²
Operating temperature	-40~105 °C

5 PIN

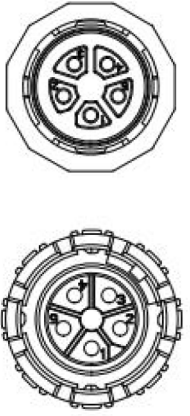

Pole Female connector Pin Male connector

TOLERANCE UNSPECIFIED			
X. ±0.35	X.XX ±0.10	X.° ±3°	X.X° ±2°
X.X ±0.20	X.XXX ±0.05	X.XX° ±1°	

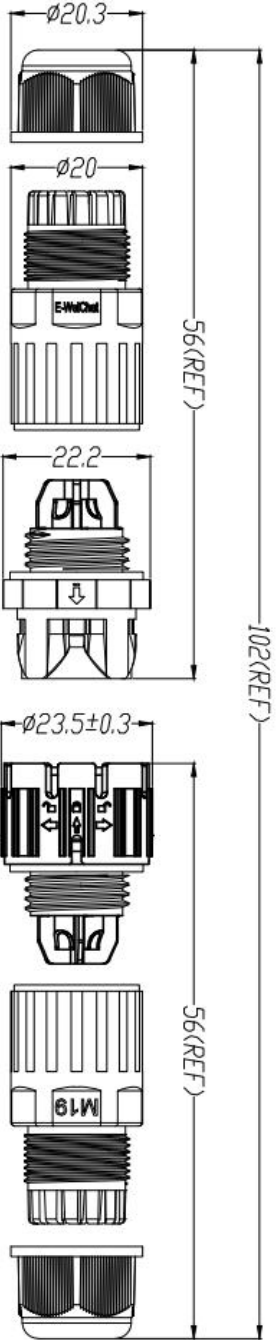

1	2	3
Part Number	Rubbers Diameter (d)	Outer Cable Diameter
WPI-M19-MF-05M16	$\phi 10.2 \text{ mm}$	$\phi 7 \sim 10 \text{ mm}$

Date	-	Rev.	-	Revision Detail	Rev/Dt.	Rev/by	Part No
Designed by	Rabia MUZAC						5 Pin Lehim Tipi Dig-Erkek Su Geçirmez I Konektor IP68
Checked by	Esin YÜKSEL						
						Drawing Nr. Scale Sheet No	
						WPI-M19-MF-05M16 NONE 1/1	