



1	2	3	4	5	6
Raw Material	PA66 SILICONE COPPER ALLOY				
Flame-resistant rating	UL94 V-2				
Level of protection	IP68				
Voltage rating/Current rating	450 V / 24 A				
Withstanding voltage	2500 V				
Cable gauge	0.5~2.5mm ²				
Operating temperature	-40~105 °C				



TOLERANCE UNSPECIFIED		
X. ±0.35	X.XX ±0.10	X.° ±3°
X.X ±0.20	X.XXX ±0.05	X.X° ±2°
		X.XX° ±1°



Rubbers Diameter

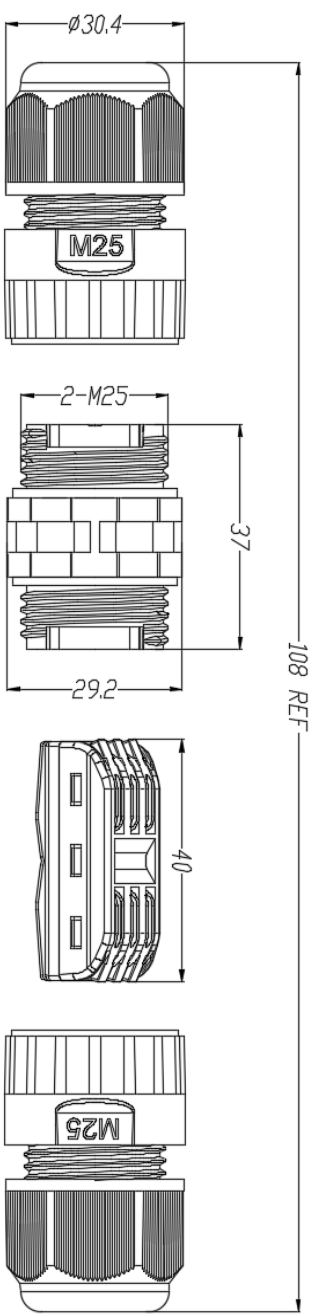

Part Number	Rubbers Diameter(d)	Outer Cable Diameter
WPI-M25B-0302M24	φ 12 mm	φ 9~12 mm

Date	-	Rev.	-	Revision Detail	Part No
Designed by	Rabia MUZAC				
Checked by	Esin YÜKSEL				
2-3 Pin Klemens Bağlantılı Konektör IP68					
Drawing Nr.	Scale	Sheet No			
WPI-M25B-0302M24	NONE	1/1			

1 2 3 4 5 6

A4