



1	Raw Material	PAG6, COPPER ALLOY, SILICONE
2	CERTIFICATION	CQC/UL/TUV/Rohs/CE
3	Flame-resistant rating	UL94 V-0
4	Level of protection	IP68
5	Voltage rating/Current rating	450V / 16A
6	Withstanding voltage	2500V
7	Cable gauge	0.5mm ² ~2.5mm ²
8	Operating temperature	-40°C~+105°C




3 Pin



Pole Female connector


Pin Male connector



Rubbers Diameter



TOLERANCE UNSPECIFIED			
X. ±0.35	X.XX ±0.10	X.° ±3°	X.X° ±2°
X.X ±0.20	X.XXX ±0.05	X.XX° ±1°	

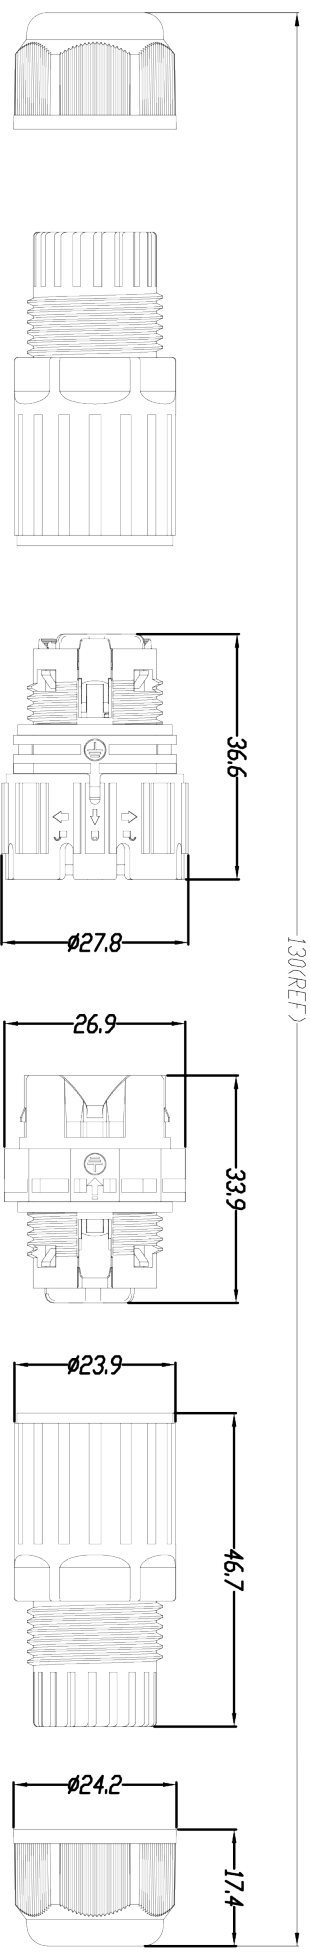

Part Number	Rubbers Diameter	Outer Cable Diameter
WPI-P23-MF-03M16	∅ 11.5mm	∅ 9-12mm

Date	Designed by	Rev.	Revision Detail	Rev/Dt.	Rev/by	Part No
-	Rabia MUZAC	-				3 Pin Vidasız Dış-Erkek
	Checked by Esin YÜKSEL					Su Geçirmez I Konnektör IP68



Drawing Nr.	Scale	Sheet No
WPI-P23-MF-03M16	NONE	1/1