



1	Raw Material	PA66, COPPER ALLOY, SILICONE
	CERTIFICATION	CQC/UL/TUV/Rohls/CE
	Flame-resistant rating	UL94 V-2
A	Level of protection	IP68
	Voltage rating/Current rating	450V / 16A
	Withstanding voltage	2500V
	Cable gauge	0.5mm ² ~2.5mm ²
	Operating temperature	-40°C~+105°C



5 Pins

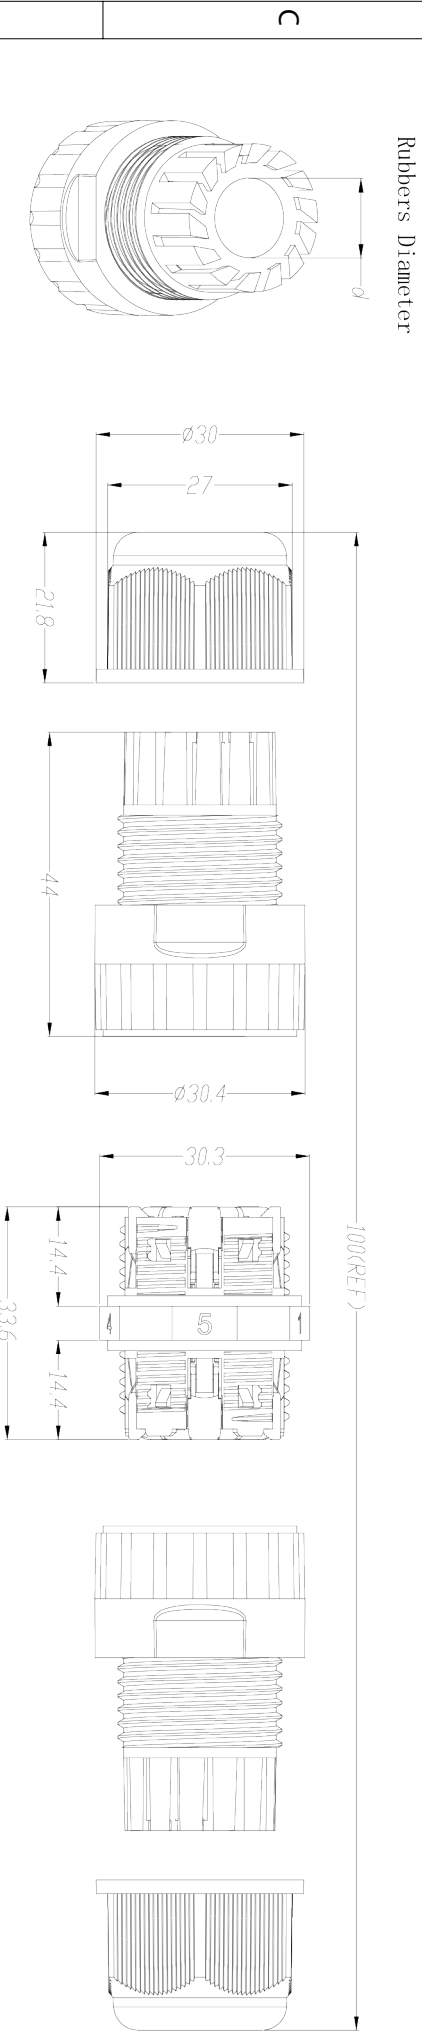

Rubbers Diameter

Part Number	Rubbers Diameter (d)	Outer Cable Diameter
WPI-P25-05M16	∅14.5	∅10-14

Date		Rev.		Revision Detail		Rev/Dt.		Rev/by		Part No	
Designed by		Checked by								5 Pin Vidasz	
Rabia MUZAC		Esin YÜKSEL								Su Geçirmez Konnektör- IP68	
TTTF										Drawing/Nr.	
										Scale	
										Sheet No	
										NONE	
										1/1	
										WPI-P25-05M16	

TOLERANCE UNSPECIFIED			
X. ±0.35	X.XX ±0.10	X.XX ±0.05	X.° ±3°
X.X ±0.20	X.XXX ±0.05	X.XXX ±1°	X.X° ±2°