


1	2	3	4	5	6
Raw Material	PA66, SILICONE, COPPER ALLOY				
Certification	RoHS				
Flame-resistant rating	UL94 V-0				
Level of protection	IP68				
Voltage rating/Current rating	450 V / 16A				
Withstanding voltage	2500 V				
Cable gauge	0.5~2.5mm <sup>2</sup>				
Operating temperature	-40~105 °C				

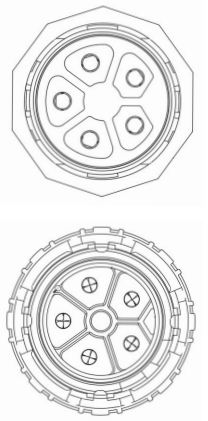



Female connector

Male connector


TOLERANCE UNSPECIFIED			
X. ±0.35	X.XX ±0.10	X.X° ±3°	X.XX° ±2°
X.X ±0.20	X.XXX ±0.05	X.XX° ±1°	



Rubbers Diameter

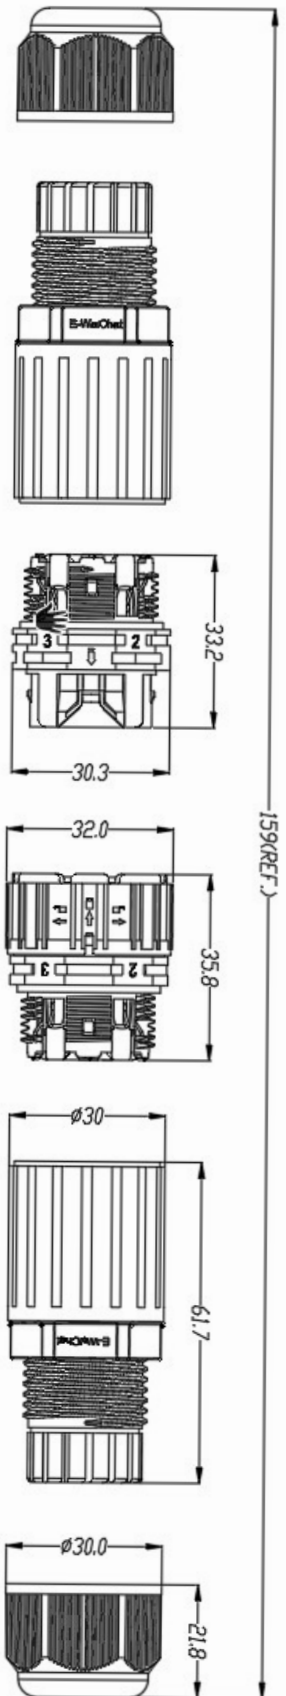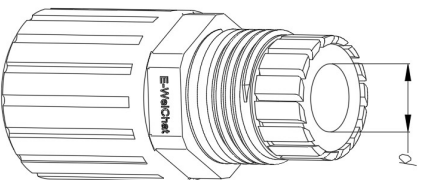

Part Number	WPI-P25-MF-05 M16
Rubbers Diameter (d)	φ 14,5 mm
Outer Cable Diameter	φ 10~14 mm

Date	-	Rev.	-	Revision Detail	Rev/Dt.	Rev/by	Part No
Designed by	Rabia MUZAC						
Checked by	Esin YÜKSEL						
							
5 Pin Vidasız Diş-Erkek Su Geçirmez I Konnektör IP68							
Drawing Nr.				Scale			
WPI-P25-MF-05 M16				NONE			
				Sheet No			
				1/1			