



1	Raw Material	PA66, COPPER ALLOY, SILICONE
1	CERTIFICATION	CQC/TUV/RoHS/CE
1	Flame-resistant rating	UL94 V-2
1	Level of protection	IP68
1	Voltage rating/Current rating	450V / 16A
1	Withstanding voltage	1500V
1	Cable gauge	0.5mm ² ~ 2.5mm ²
1	Operating temperature	-40°C ~ +105°C



TOLERANCE UNSPECIFIED		
X. ±0.35	X.XX ±0.10	X.° ±3°
X.X ±0.20	X.XXX ±0.05	X.X° ±2°
		XXX° ±1°



2	Part Number	WPT-P20T-03M16
2	Rubbers Diameter	∅ 11.5mm
2	Outer Cable Diameter	∅ 9-12mm

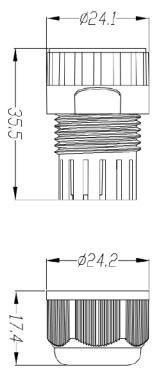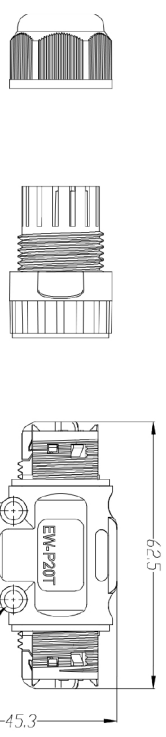

3	Date		Rev.	
3	Designed by	Rabia MUZAC		
3	Checked by	Esin YUKSEL		

4	Date		Rev.	
4	Designed by	Rabia MUZAC		
4	Checked by	Esin YUKSEL		
5	Revision Detail		Rev./Dt.	Rev/by
5	Part No	3 Pin Vidasz		
5	Drawing Nr.	Su Geçirmez T Konnektör IP68		
5	Scale	WPT-P20T-03M16		
5	Sheet No	NONE		
5		1/1		