


VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
	11-50	±0.5
UNIT: mm	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

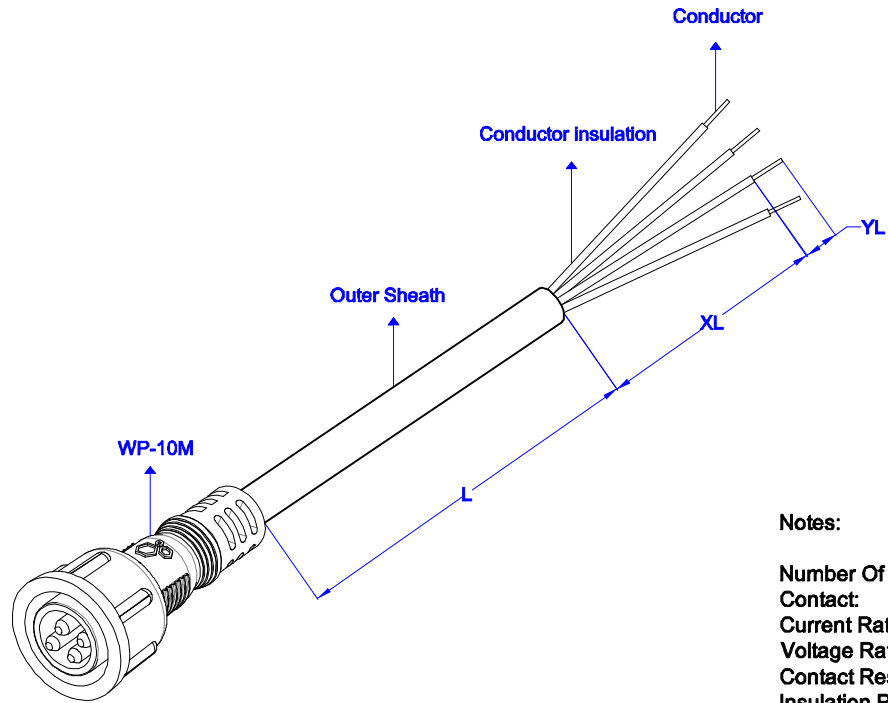

Notes:

Number Of Contact: 4 Pin
Contact: Brass Nickel Plated
Current Rating Percontact: 2,5A
Voltage Rating: 220V AC
Contact Resistance: <10M Ω
Insulation Resistance: 1000M Ω at DC 500V.
Breakdown Voltage: 1,5KV / 1 minute
Temperature Rating: -30C°~+70C°
Durability (Plug/Unplug): 3000 times
Waterproof Rating: IP67
Certificate: CE ; ROHS

ORDER CODE:

WP-10M XXXX XX X XXX XX X
 → Conductor Solder : if yes: Y
if not: 0
 → Conductor insulation Stripping : if yes: YL (mm)
if not: 00
 → Outer Sheath Stripping : if yes: XL (mm)
if not: 00
 → Color : B: Black W : White
 → Cable : CI: PVC H05VV-F (TTR) 4x0,50mm² O.D: 5,8 ±0.2
 → Length : L (mm)

6	-	PVC MOLDING (black or white)	-	-	-
5	-	PVC NUT (black or white)	-	1	pc.
4	-	GASKET (red)	-	1	pc.
3	-	TERMINAL - FEMALE	-	2	pcs.
2	-	TERMINAL - MALE	-	2	pcs.
1	-	IEC 62(RVV) 300/300V 4x0.50mm ² CABLE (black or white)	-	2	pcs.


No	Material Code	Description	Size (mm)	Q'ty	Unit
----	---------------	-------------	-----------	------	------

Date	16.12.2016	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	WP-10M 4 Pin Seal Harness
Designed by	Yegim AKSOY	Checked by	Fatih BOLACA								




Drawing Nr.	Scale	Sheet No
-	NONE	1/2


" Dimensions (mm) "







front view



WP-10M

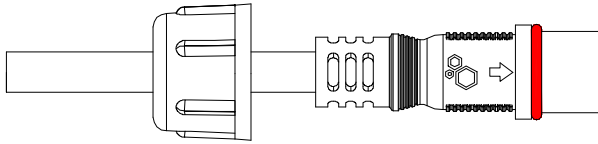

WP-10F

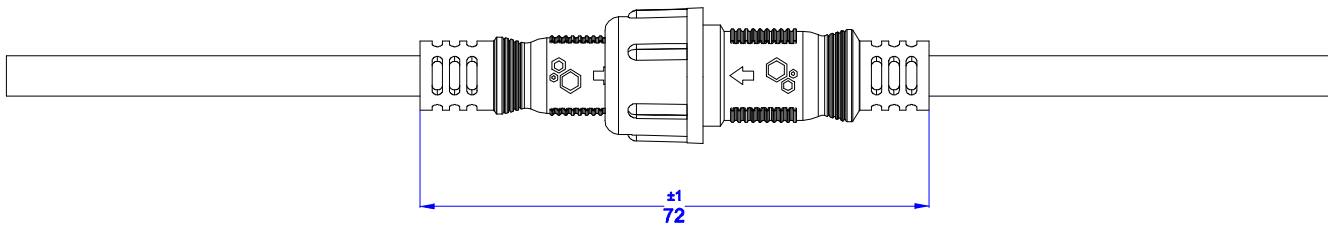

Date	16.12.2016	Rev.		Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yegim AKSOY		-				WP-10F / WP-10M Connection Details		
Checked by	Fatih BOLACA						Drawing Nr.	Scale	Sheet No
							-	NONE	2/2



1

2

3

4

5

6

A4