


VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
	11-50	±0.5
UNIT: mm	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

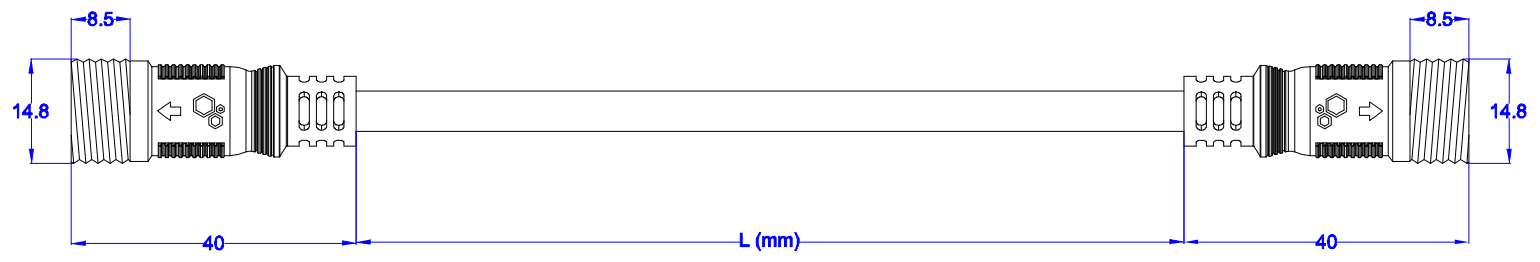

Notes:

Number Of Contact: 2 Pin
Contact: Brass Nickel Plated
Current Rating Percontact: 5A
Voltage Rating: 220V AC
Contact Resistance: <10M Ω
Insulation Resistance: 1000M Ω at DC 500V.
Breakdown Voltage: 1,5KV / 1 minute
Temperature Rating: -30C°~+70C°
Durability (Plug/Unplug): 3000 times
Waterproof Rating: IP67
Certificate: CE ; ROHS

ORDER CODE:

WP-49FF XXXX XX X

→ Color : B: Black W: White

→ Cable : BC: PVC H05VV-F (TTR) 2x0,50mm² O.D: 5,4 ±0.2
 BD: PVC H05VV-F (TTR) 2x0,75mm² O.D: 6,0 ±0.2

→ Lenght : L (mm)

6	-	PVC MOLDING (black or white)	-	-	-
5	-	PVC NUT (black or white)	-	1	pc.
4	-	GASKET (red)	-	1	pc.
3	-	TERMINAL - FEMALE	-	2	pcs.
2	-	TERMINAL - MALE	-	2	pcs.
1	-	IEC 62(RVV) 300/300V 2x0.75mm ² CABLE (black or white)	-	2	pcs.
No	Material Code	Description	Size (mm)	Q'ty	Unit
Date	16.12.2016	Rev.	Revision Detail		Rev.Dt. Rev.by
Designed by	Yegim AKSOY	-			
Checked by	Fatih BOLACA				
					Part No
					WP-49FF 2 Pin Seal Harness
			Drawing Nr.	Scale	Sheet No
			-	NONE	1/3

A

B

C

D

1

2


3

4

5

6

A4

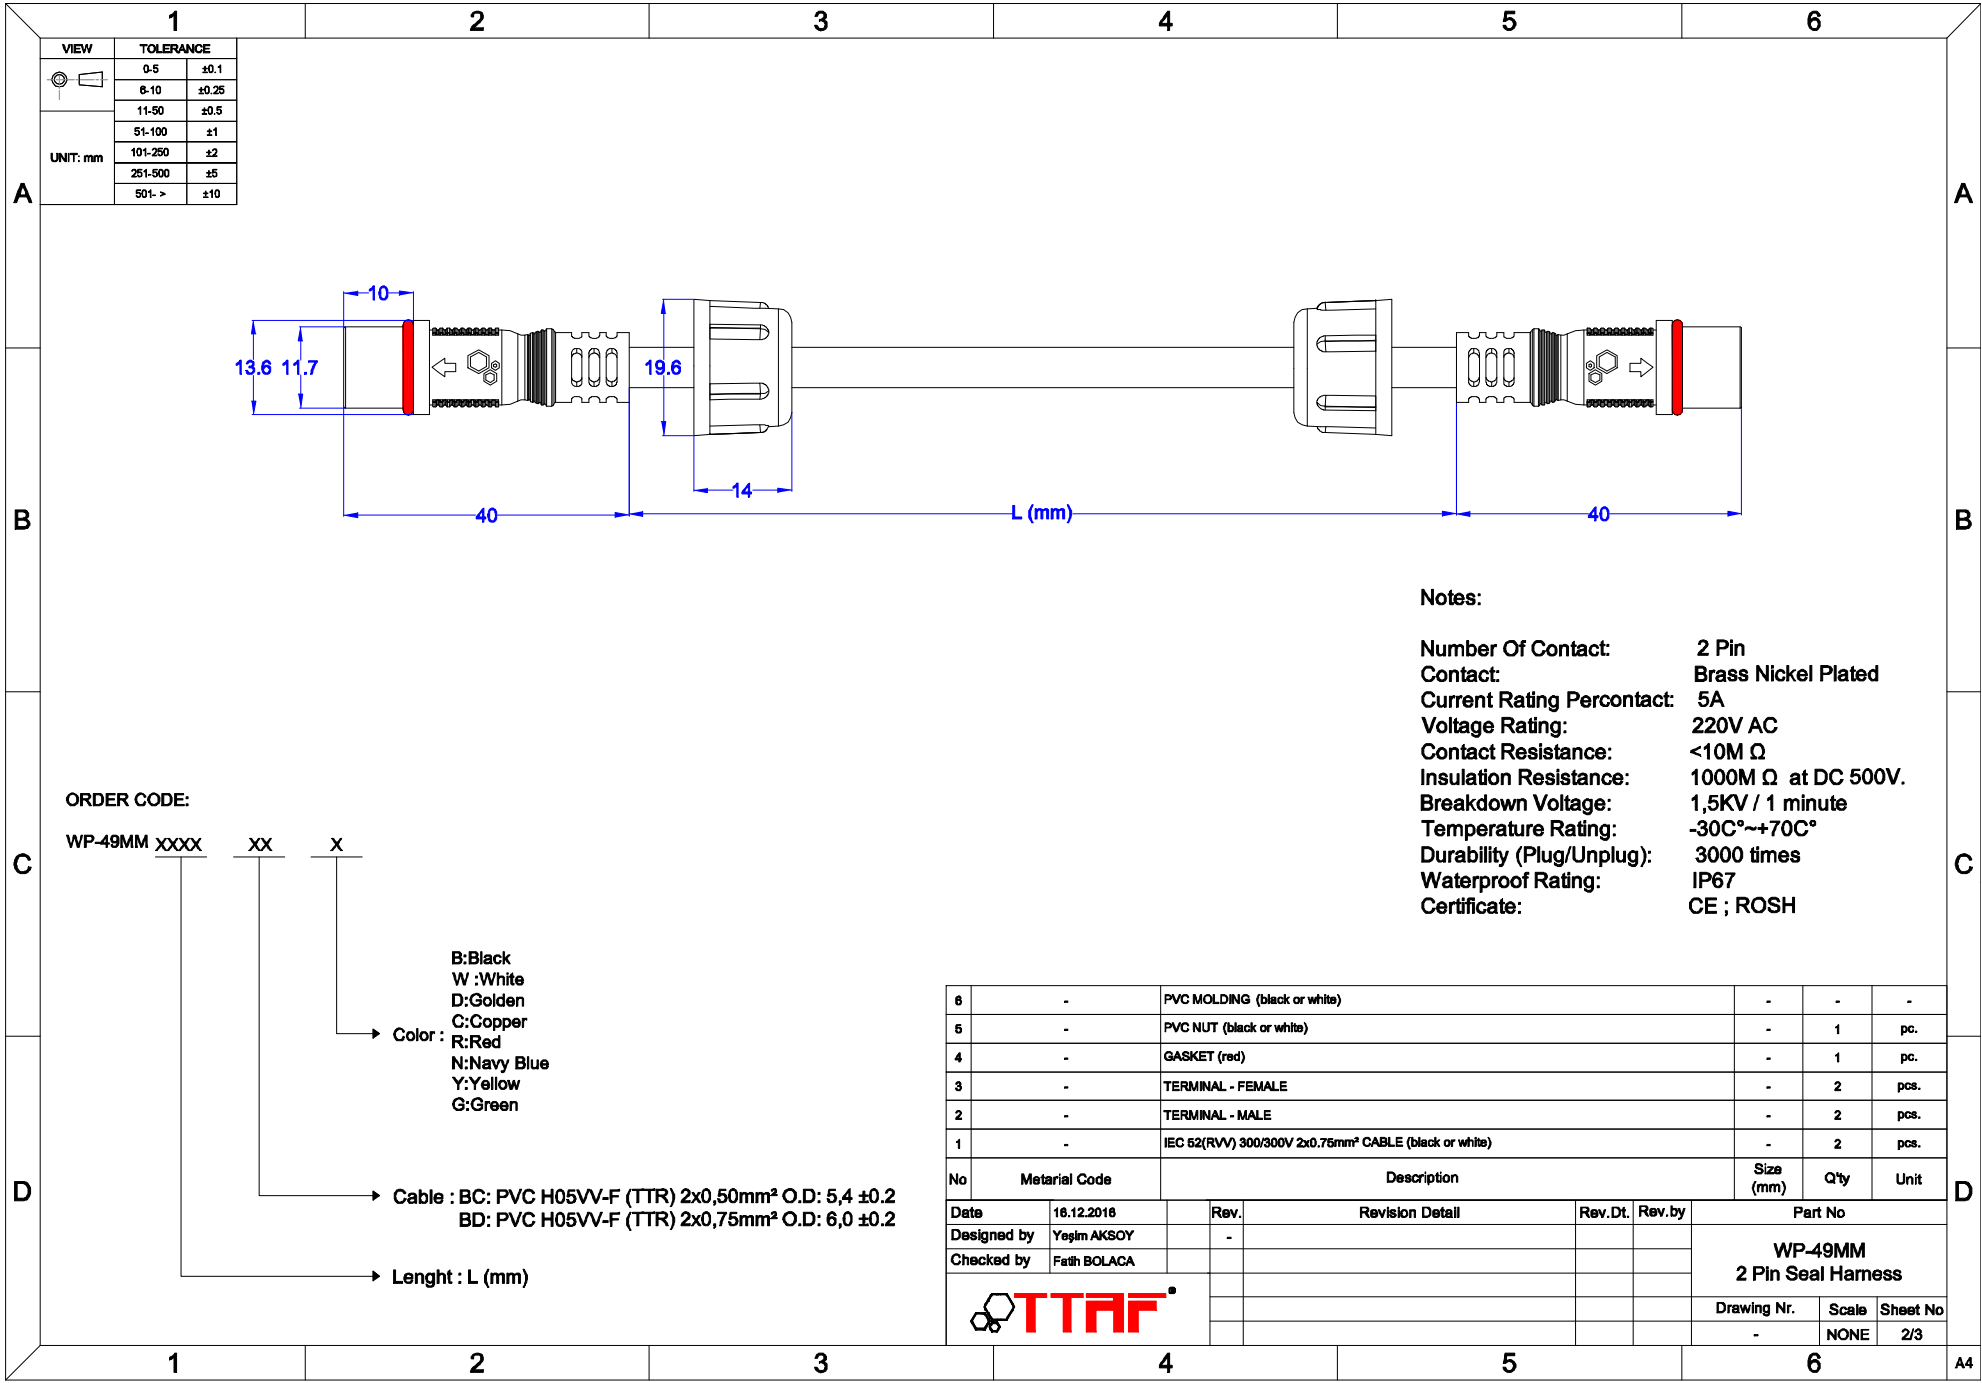

VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
	11-50	±0.5
UNIT: mm	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

Notes:

- Number Of Contact: 2 Pin
- Contact: Brass Nickel Plated
- Current Rating Percontact: 5A
- Voltage Rating: 220V AC
- Contact Resistance: <10M Ω
- Insulation Resistance: 1000M Ω at DC 500V.
- Breakdown Voltage: 1,5KV / 1 minute
- Temperature Rating: -30C°~+70C°
- Durability (Plug/Unplug): 3000 times
- Waterproof Rating: IP67
- Certificate: CE ; ROHS

ORDER CODE:

WP-49MM XXXX XX X

- B:Black
- W :White
- D:Golden
- C:Copper
- Color : R:Red
- N:Navy Blue
- Y:Yellow
- G:Green

Cable : BC: PVC H05VV-F (TTR) 2x0,50mm² O.D: 5,4 ±0.2
 BD: PVC H05VV-F (TTR) 2x0,75mm² O.D: 6,0 ±0.2


Lenght : L (mm)

No	Material Code	Description	Size (mm)	Q'ty	Unit
6	-	PVC MOLDING (black or white)	-	-	-
5	-	PVC NUT (black or white)	-	1	pc.
4	-	GASKET (red)	-	1	pc.
3	-	TERMINAL - FEMALE	-	2	pcs.
2	-	TERMINAL - MALE	-	2	pcs.
1	-	IEC 62(RVV) 300/300V 2x0.75mm ² CABLE (black or white)	-	2	pcs.

Date	16.12.2016	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	WP-49MM 2 Pin Seal Harness		
Designed by	Yegim AKSOY	Checked by	Fatih BOLACA							Drawing Nr.	Scale	Sheet No	
										-	NONE	2/3	



VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
	11-50	±0.5
UNIT: mm	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

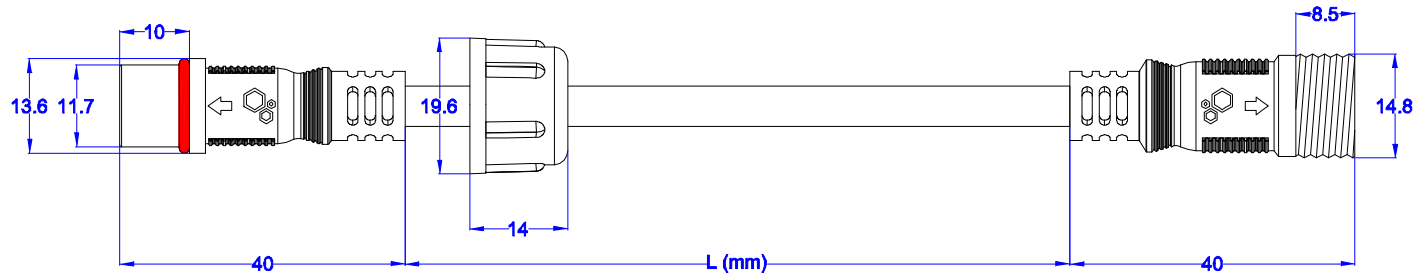

Notes:

Number Of Contact: 2 Pin
 Contact: Brass Nickel Plated
 Current Rating Percentcontact: 5A
 Voltage Rating: 220V AC
 Contact Resistance: <10M Ω
 Insulation Resistance: 1000M Ω at DC 500V.
 Breakdown Voltage: 1,5KV / 1 minute
 Temperature Rating: -30C°~+70C°
 Durability (Plug/Unplug): 3000 times
 Waterproof Rating: IP67
 Certificate: CE ; ROHS

ORDER CODE:

WP-49FM XXXX XX X

→ Color : B: Black W : White

→ Cable : BC: PVC H05VV-F (TTR) 2x0,50mm² O.D: 5,4 ±0.2
 BD: PVC H05VV-F (TTR) 2x0,75mm² O.D: 6,0 ±0.2

→ Lenght : L (mm)

6	-	PVC MOLDING (black or white)	-	-	-
5	-	PVC NUT (black or white)	-	1	pc.
4	-	GASKET (red)	-	1	pc.
3	-	TERMINAL - FEMALE	-	2	pcs.
2	-	TERMINAL - MALE	-	2	pcs.
1	-	IEC 62(RVV) 300/300V 2x0.75mm ² CABLE (black or white)	-	-	pcs.
No	Material Code	Description	Size (mm)	Q'ty	Unit
Date	16.12.2016	Rev.	Revision Detail		Rev.Dt. Rev.by
Designed by	Yegim AKSOY	-			
Checked by	Fatih BOLACA				
					Part No
					WP-49FM 2 Pin Seal Harness
			Drawing Nr.	Scale	Sheet No
			-	NONE	3/3