


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001- >	±150





Δ Order Code : **WW250-XX-M**

Male
Number of contact : 2 to 12 pin

**TTAF
APPROVAL**

Δ Material : Nylon 66 UL94V-0

Voltage Rating : 250V AC,DC
Current Rating : 2.5A
Withstanding Voltage : 800V AC/minute
Insulation Resistance : 1.000M Ω Min
Temperature Range : -25 °C ~ + 85 °C

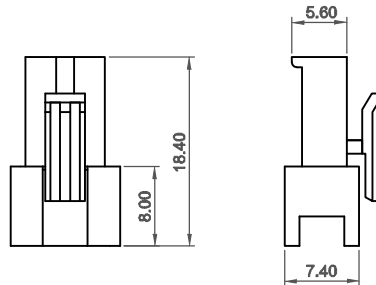

Contact No.	Dimensions(mm)	
	A	B
2	2.50	8.00
3	5.00	10.50
4	7.50	13.00
5	10.00	15.50
6	12.50	18.00
7	15.00	20.50
8	17.50	23.00
9	20.00	25.50
10	22.50	28.00
11	25.00	30.50
12	27.50	33.00

Date	14.05.2015	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	WW250-XX-M
Designed by	Yeşim AKSOY	Checked by	Fatih BOLACA							Drawing Nr.	
										Scale	NONE
										Sheet No	1/1



1

2

3

4

5

6

A4