

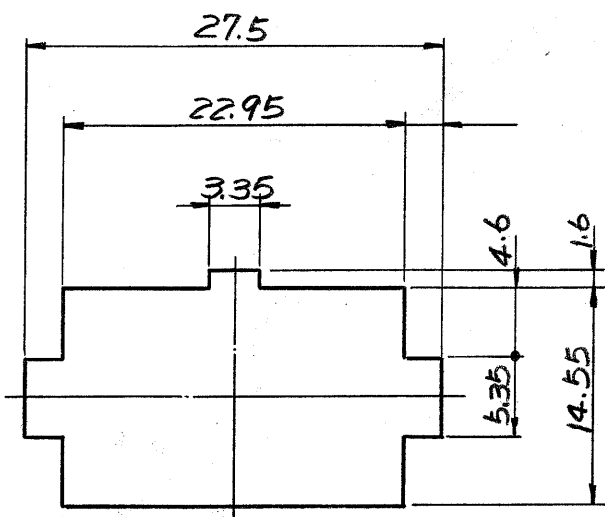
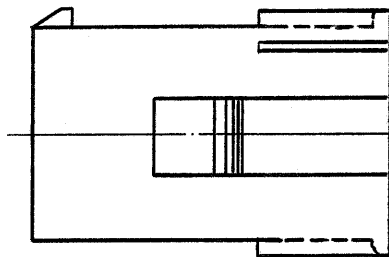
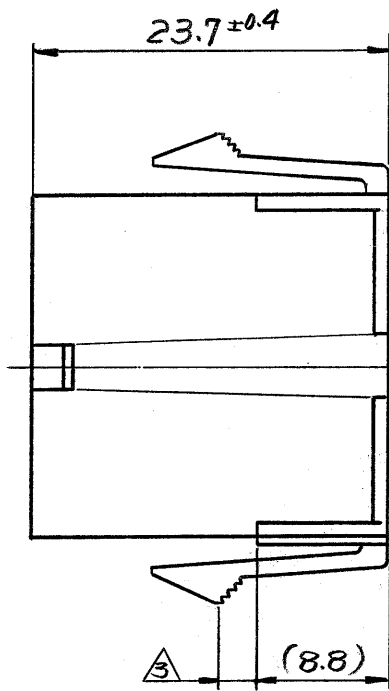


© 1980 日本エー・エム・ピー株式会社  
AMP 社の諸製品は特許又は特許出願中

© 1980 BY AMP (Japan) Ltd.  
ALL RIGHTS RESERVED. AMP  
PRODUCTS COVERED BY PATENTS  
AND/OR PATENTS PENDING

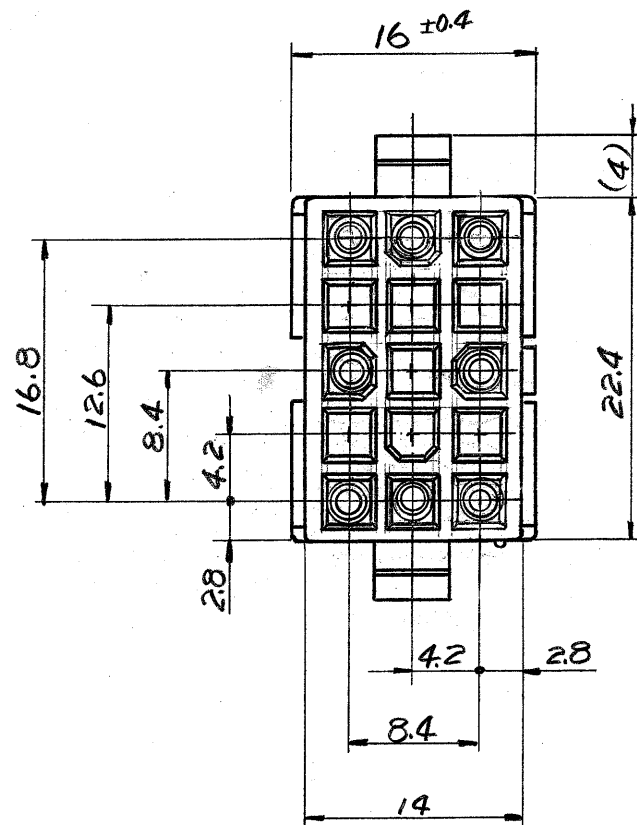

寸法公差は±0.20 (TOLERANCE: ±0.2)  
パネル取付穴 (DIMENSION OF PANEL)

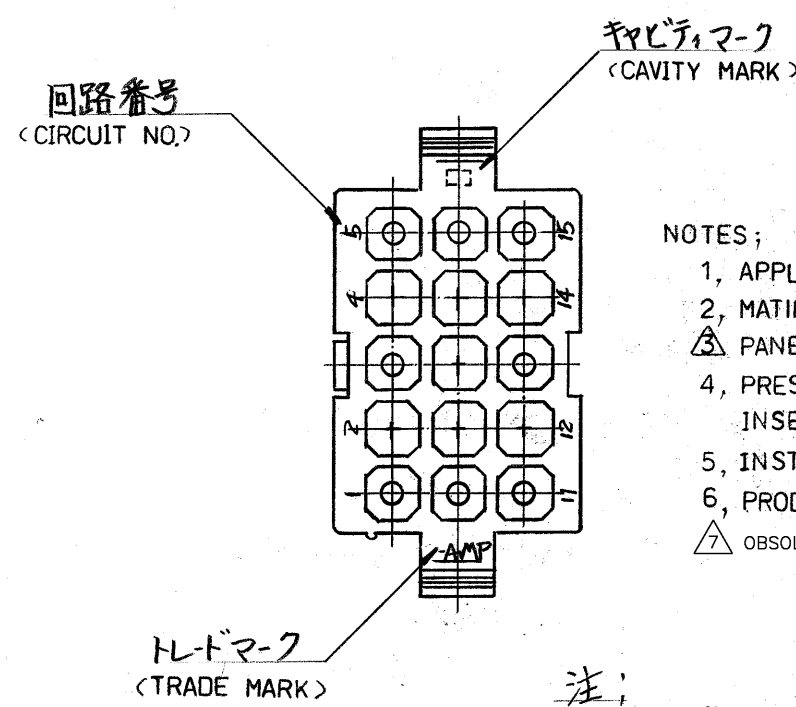

- NOTES;
- 1, APPLIED CONTACT P/N: 170359, 170360, 170361, 170362
  - 2, MATING CONN: PLUG HOUSING P/N 172342
  - △ PANEL THICKNESS: 0.8 ~ 2.0 mm
  - 4, PRESS DIRECTION OF PANEL MUST BE SAME AS HOUSING INSERTED DIRECTION.
  - 5, INSTRUCTION SHEET: IS-105J
  - 6, PRODUCT SPEC: 108-5151
  - △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

- 注:
1. 使用端子型番は 170359, 170360, 170361, 170362.
  2. 嵌合相手ハウジング型番は 172342
  - △ 適用パネル厚 0.8 ~ 2.0 mm
  4. 取付穴打抜方向とハウジングの挿入方向は同じとする。
  5. 取扱説明書: IS-105J
  6. 適用製品仕様書: 108-5151

 <b>OBSOLETE</b>	黄 (YELLOW)	1 - 172334 - 4
	黒 (BLACK)	1 - 172334 - 9
	青 (BLUE)	1 - 172334 - 6
	緑 (GREEN)	1 - 172334 - 5
	赤 (RED)	1 - 172334 - 2
	自然色 (NATURAL)	172334 - 1
	色 (COLOR)	型番 (P/N)

LTR.	変更 (REVISION RECORD)	DR.	CHK.	DATE
A2	ECO-10-000444	KK	AEG	JAN 10
A1	黄色追加 J-10297	TO	M.S	7/28
A	変更 J-9972	AK	AK	8/17
O1	変更 J81-5998	R.Y.	R.Y.	4/51
O	作成 J81-5957	R.Y.	R.Y.	3/6

材料 (MATERIAL) 6/6 ナイロン (UL94V-2) (NYLON 6/6 UL94V-2)	一般公差 TOLERANCE ± 0.3 EXCEPT ± 1.0 AS NOTED	日本エー・エム・ピー株式会社 TOKYO, JAPAN 名称 (NAME) MINI-UNIVERSAL MATE-N-LOK CONN. CAP HOUSING 15Pos. (UL94V-2) 15極 ミニユニバーサルメイトンロックコネクタ キャップハウジング (UL94V-2)
仕上 (FINISH) 色: 表参照 HOUSING: SEE TABLE COLOR	DR. R. Yuasa 4/20/81 CHK. J. Taniguchi 4/21/81 DE. J. Taniguchi 4/21/81 APP.	
名称 (NAME) MINI-UNIVERSAL MATE-N-LOK CONN. CAP HOUSING 15Pos. (UL94V-2) 15極 ミニユニバーサルメイトンロックコネクタキャップハウジング (UL94V-2)		SIZE B LOC J 番号 (NO.) C-172334
尺度 (SCALE) 2:1 REV. A2 SHEET		