



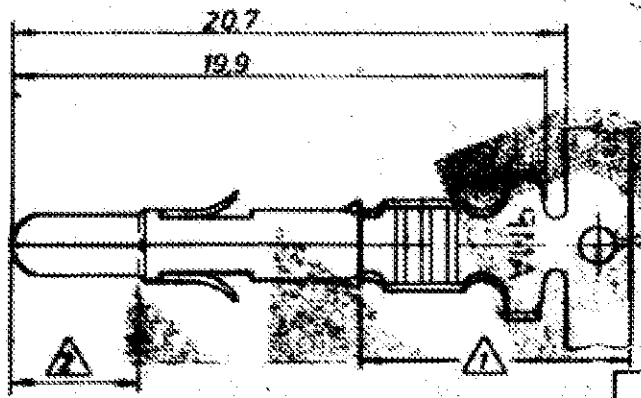





Index	Änderung	Tag	Name
K2	REVISED PER ECO-11-005139	18MAR11	RK/HMR

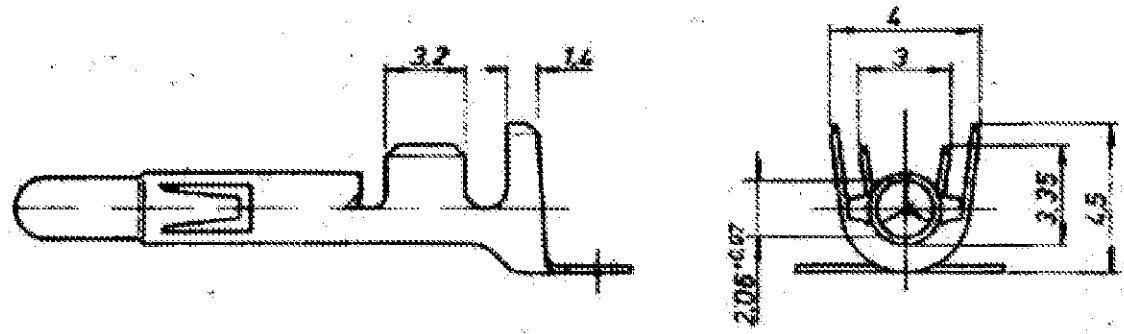

 Sn über Ni in der Crimpzone  
 Gold über Nickel in der Kontaktzone

3. Für Isolationsø 15 - 3.3 mm geeignet

926 894 - 7	926 883 - 7	CuZn 30 F 53	 
926 894 - 6	926 883 - 6	CuSn 4 F 56	 
926 894 - 5	926 883 - 5	CuCrZr F 50	vorverzinkt
926 894 - 4	926 883 - 4	CuCrZr F 50	blank
926 894 - 3	926 883 - 3	CuSn 4 F 56	vorverzinkt
926 894 - 1	926 883 - 1	CuZn 30 F 53	vorverzinkt
LOOSE PIECE	Bestell-Nr.	Werkstoff	Oberfläche Farbe
	22.101 7R21	2.2.81 G	

Änderungen, die dem technischen Zeichnungsstand entsprechen, behalten wir uns vor.

**ETE** TE Connectivity

**Universal M-N-L Stift**  
**DGB 0,5 - 2,1 mm<sup>2</sup>**

Nicht lötlotechte Metall	Formel	Zusammen-Nr.	<b>K</b>
± 0,2 mm	<b>B</b>	<b>926883</b>	
Verhältnis 5:1			K2