


VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
	11-50	±0.5
UNIT: mm	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

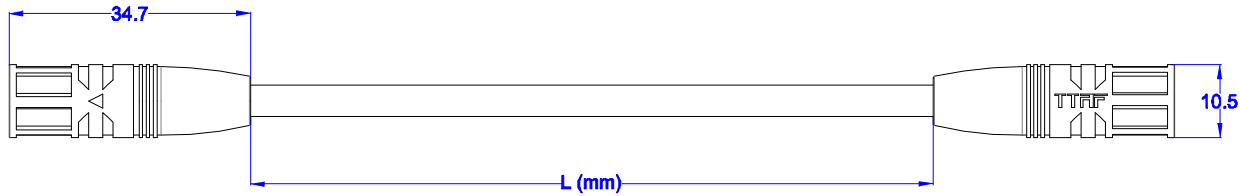

Notes:

Number Of Contact: 4 Pin
Contact: Brass Nickel Plated
Current Rating Percontact: 4A
Voltage Rating: 220V AC
Contact Resistance: <10M Ω
Insulation Resistance: 1000M Ω at DC 500V.
Breakdown Voltage: 1,5KV / 1 minute
Temperature Rating: -30C°~+70C°
Durability (Plug/Unplug): 3000 times
Waterproof Rating: IP67
Certificate: CE ; ROHS

ORDER CODE:


WP-45FF XXXX XX X

→ Color : B: Black W : White

→ Cable : BA: PVC H03VV-F (TTR) 4x0,25mm² O.D: 5,2 ±0.2

→ Lenght : L (mm)

4	-	PVC MOLDING / BLACK	-	-	-
3	-	4 PIN FEMALE CONNECTOR / BLACK	-	1	pc.
2	-	4 PIN MALE CONNECTOR / BLACK	-	1	pc.
1	KBL-9046	4x0.26mm² CABLE / BLACK	-	-	-
No	Material Code	Description	Size (mm)	Q'ty	Unit
Date	16.12.2016	Rev.	Revision Detail		Rev.Dt. Rev.by
Designed by	Yegim AKSOY	-			
Checked by	Fatih BOLACA				
			WP-45FF 2 Pin Seal Harness		
			-	NONE	1/3

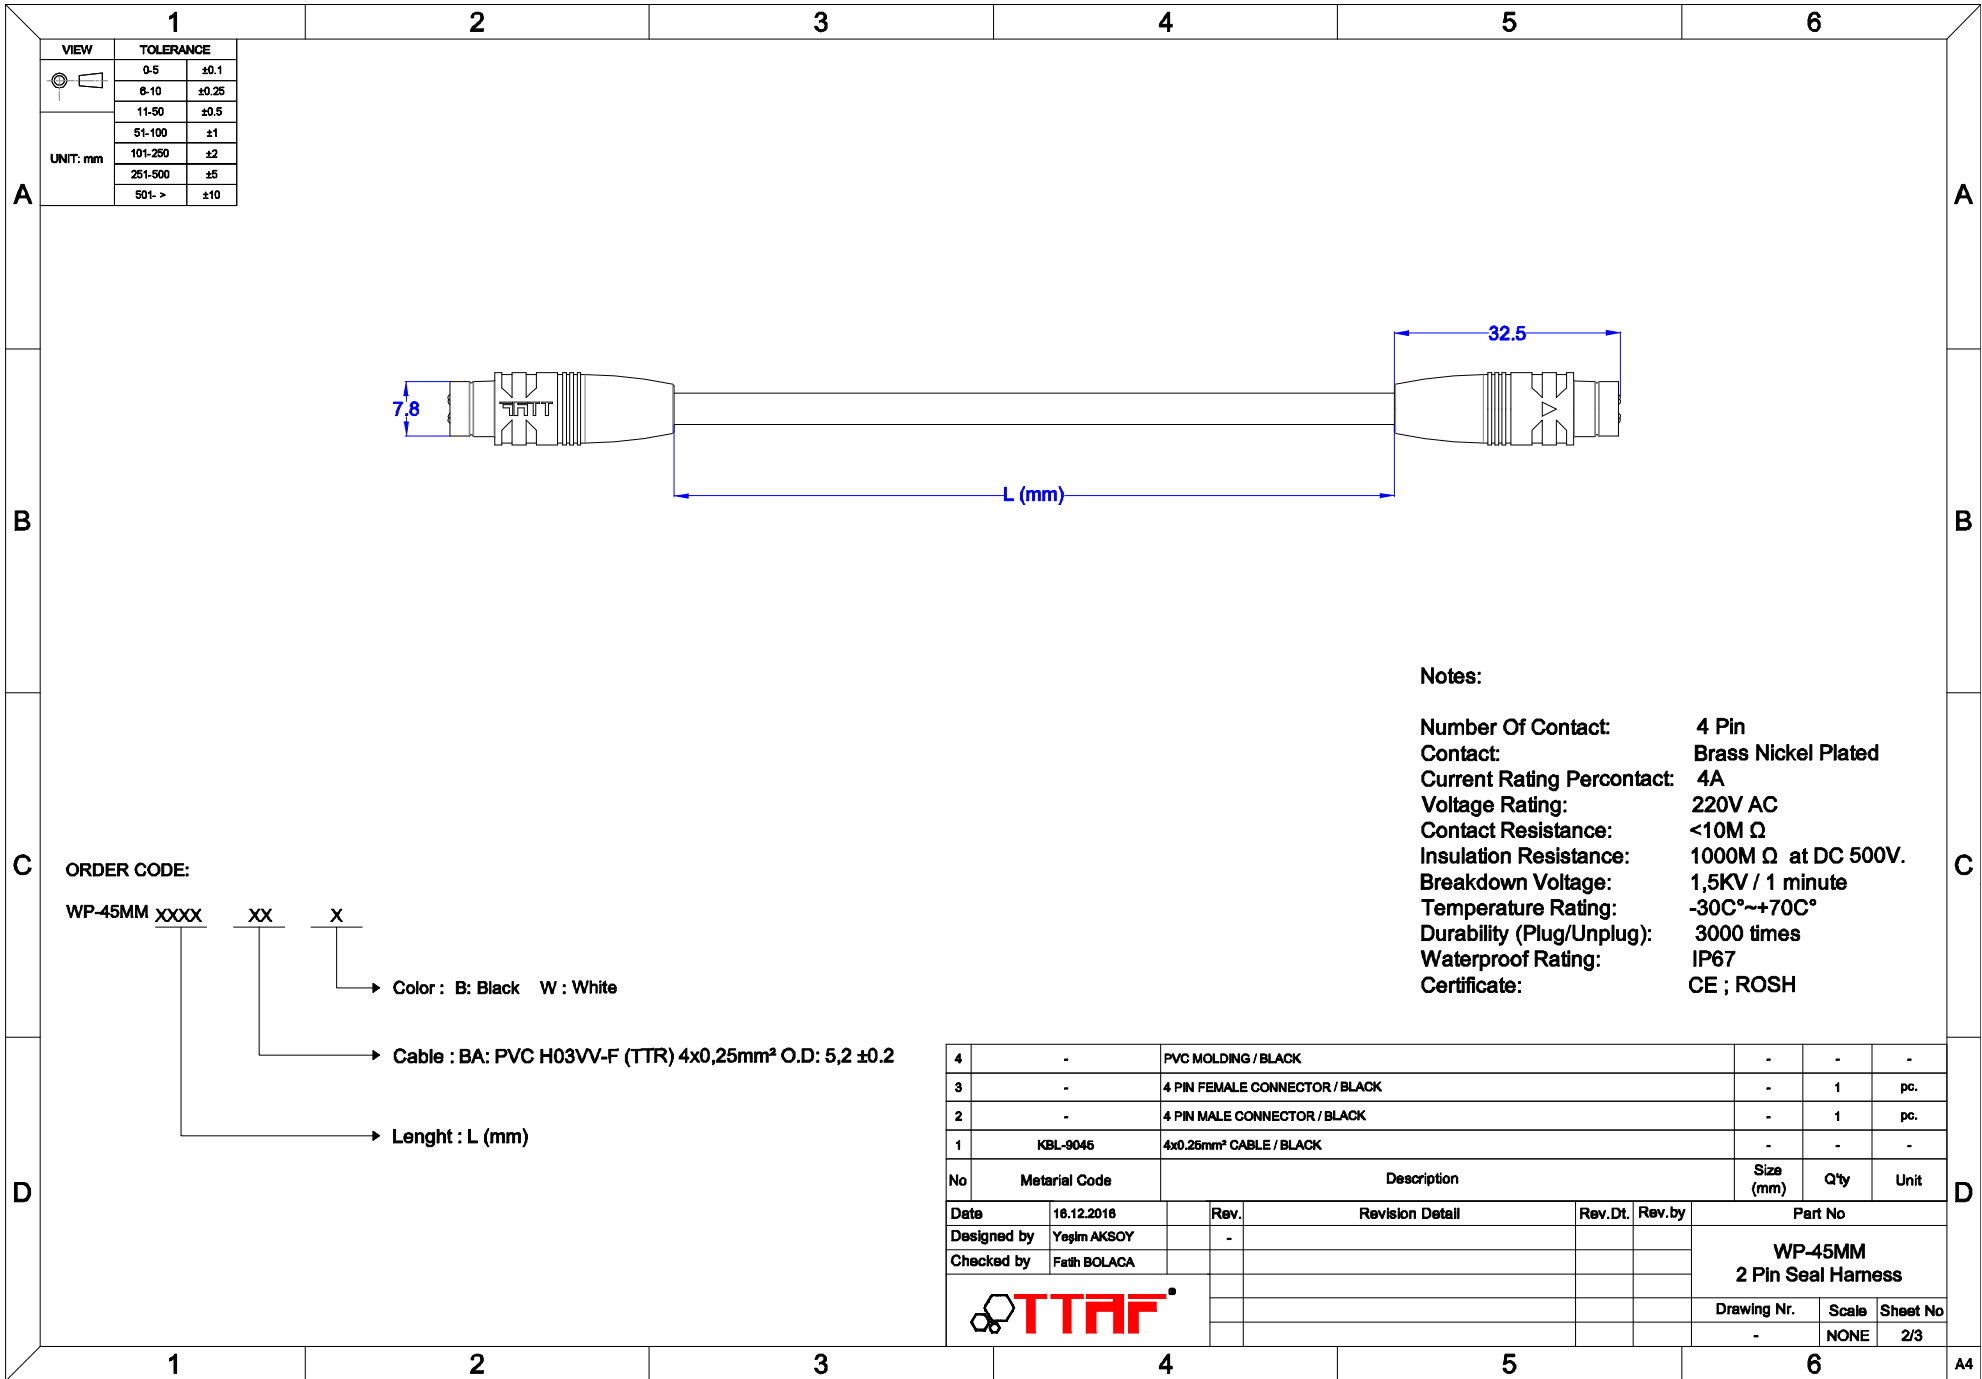

Notes:


Number Of Contact: 4 Pin
 Contact: Brass Nickel Plated
 Current Rating Percontact: 4A
 Voltage Rating: 220V AC
 Contact Resistance: <10M Ω
 Insulation Resistance: 1000M Ω at DC 500V.
 Breakdown Voltage: 1,5KV / 1 minute
 Temperature Rating: -30C°~+70C°
 Durability (Plug/Unplug): 3000 times
 Waterproof Rating: IP67
 Certificate: CE ; ROHS

ORDER CODE:

WP-45MM XXXX XX X
 → Color : B: Black W : White
 → Cable : BA: PVC H03VV-F (TTR) 4x0,25mm² O.D: 5,2 ±0.2
 → Lenght : L (mm)

4	-	PVC MOLDING / BLACK	-	-	-
3	-	4 PIN FEMALE CONNECTOR / BLACK	-	1	pc.
2	-	4 PIN MALE CONNECTOR / BLACK	-	1	pc.
1	KBL-9046	4x0.26mm² CABLE / BLACK	-	-	-
No	Material Code	Description	Size (mm)	Q'ty	Unit
Date	16.12.2016	Rev.	Revision Detail		Rev.Dt. Rev.by
Designed by	Yegim AKSOY	-			
Checked by	Fatih BOLACA				
			WP-45MM 2 Pin Seal Harness		
			-	NONE	2/3

VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
	11-50	±0.5
UNIT: mm	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

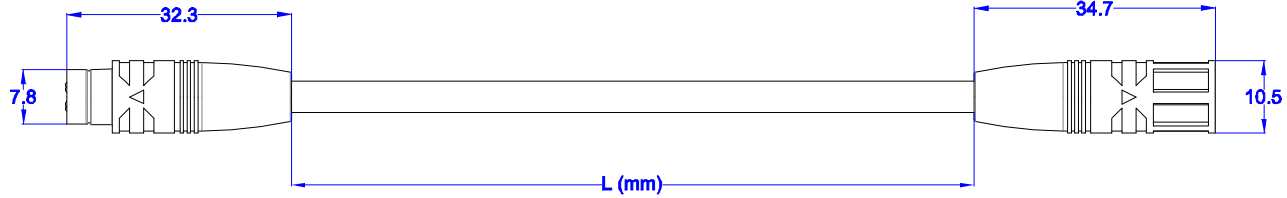

Notes:

Number Of Contact: 4 Pin
Contact: Brass Nickel Plated
Current Rating Percontact: 4A
Voltage Rating: 220V AC
Contact Resistance: <10M Ω
Insulation Resistance: 1000M Ω at DC 500V.
Breakdown Voltage: 1,5KV / 1 minute
Temperature Rating: -30C°~+70C°
Durability (Plug/Unplug): 3000 times
Waterproof Rating: IP67
Certificate: CE ; ROHS

ORDER CODE:

WP-45FM XXXX XX X

→ Color : B: Black W : White

→ Cable : BA: PVC H03VV-F (TTR) 4x0,25mm² O.D: 5,2 ±0.2

→ Lenght : L (mm)

4	-	PVC MOLDING / BLACK	-	-	-
3	-	4 PIN FEMALE CONNECTOR / BLACK	-	1	pc.
2	-	4 PIN MALE CONNECTOR / BLACK	-	1	pc.
1	KBL-9046	4x0.26mm ² CABLE / BLACK	-	-	-
No	Material Code	Description	Size (mm)	Q'ty	Unit
Date	16.12.2016	Rev.	Revision Detail		Rev.Dt. Rev.by
Designed by	Yegim AKSOY	-			
Checked by	Fatih BOLACA				
			WP-45FM 2 Pin Seal Harness		
			-	NONE	3/3